

SIG 3015

Low-voltage over-pressure dual-coil lamps, railway



Areas of application

- Railway traffic signalling systems

Product benefits

- Second filament takes over when the main filament fails
- Various wattages matched to specific needs of the relevant optical systems

Product features

- Dual-coil lamps for higher operation safety of the signalling system



Product datasheet

Technical data


Electrical data

Nominal wattage	15 W
Nominal voltage	30.0 V
Test voltage	30 V

Photometrical data

Nominal luminous flux	160 lm
-----------------------	--------

Dimensions & weight

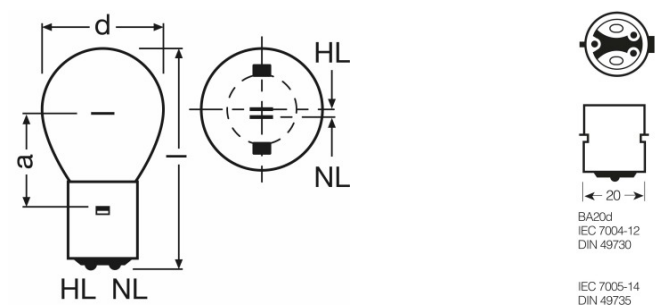

Diameter	36.0 mm
Overall length	67.0 mm
Light center length (LCL)	29.6 mm ¹⁾

¹⁾ ±0.15 mm / Distance from the coil to the top of base

Lifespan

Nominal lamp life time	8800 h ¹⁾
------------------------	----------------------

¹⁾ Average lifespan at test voltage/current

Additional product data

Base (standard designation)	BA20d
-----------------------------	-------

Capabilities

Burning position	hs30 ¹⁾
------------------	--------------------

¹⁾ Lamps with transverse filaments should only be inclined perpendicular to the filament plane

Country specific categorizations

Order reference	SIG 3015UELLCL1
-----------------	-----------------

Product datasheet

Safety advice

Use only in equipment/luminaires that are specially designed for the purpose.
Protect the lamps against moisture during operation and installation.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300831336	SIG 3015	Unpacked 1	- x - x -		18.60 g
4050300559322	SIG 3015	Folding carton box 10	- x - x -		
4050300559339	SIG 3015	Shipping carton box 100	410 mm x 205 mm x 170 mm	14.29 dm ³	2700.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.