





00843029



00843057

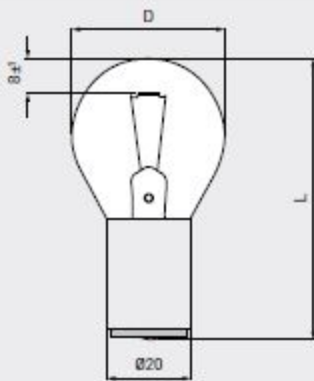

Article no.	Description	V	W	Am- perage	Cap	Bulb diameter D mm	Total length L max. mm	Light centre length LCL mm	Lumino- us flux lm	Average life h	Individual life h	Burning position	PU
00843029	6V 30W BA20d 35x67 clear	6	30		Ba20d/26	35	67	9*	450	300		h105	
00843030	6V 30W BA20d 35x60 clear	6	30		Ba20d/23	35	60	9*	400	300		h105	
00843031	6V 30W S20s	6	30		S20s/28	35	65	8*	580	100			
00843165	12V 50W BA20d	12	50		BA20d	35	69	39.5	1,200	50			
00843057	12V 60W BA20d	12	60		BA20d	35	64.2	9*	1,200	100			

* distance between filament and bulb dome