


PRODUCT DATASHEET

HALOLINE PRO 120 W 240 V R7S

HALOLINE® PRO | Double ended halogen lamps with tube base

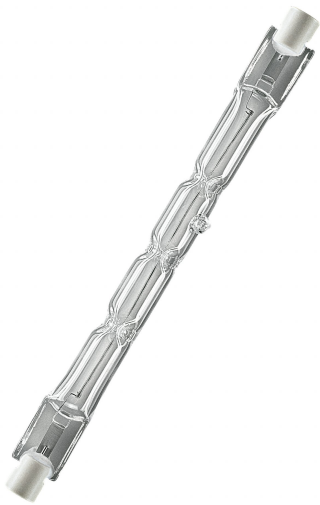

Areas of application

- General illumination
- Entrance lighting
- Pathway lighting
- Outdoor applications only in suitable luminaires
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings
- Ideal for emphasizing and accentuating the structure of a room

Product benefits

- Brilliant accent lighting
- Direct replacement for standard tubular halogen lamps
- Significantly lower CO₂ emissions compared to standard version
- Lower thermal output (compared with the standard reference product)
- No transformer required
- Contains no mercury

Product features

- Average life: 2,000 h
- Dimmable
- Color rendering index R_a: 100

TECHNICAL DATA

Electrical data

Nominal wattage	120 W
Nominal voltage	240 V
Claimed equiv. conventional lamp power	150 W
Power factor λ	1,00

Photometrical data

Luminous flux	2220 lm
Luminous efficacy	18 lm/W
Lumen main.fact.at end of nom.life time	0.80
Light color (designation)	Warm White
Color temperature	2900 K
Color rendering index Ra	100
Light color	1029
UV protection	No

Light technical data

Warm-up time (60 %)	0.00 s
Starting time	0.0 s

Dimensions & weight

Overall length	114.20 mm
Length	114.20 mm
Diameter	12.00 mm
Maximum diameter	12 mm
Product weight	7.5 g

Lifespan

Nominal lamp life time	2000 h
Number of switching cycles	50000

Additional product data

Base (standard designation)	R7s
Mercury content	0.0 mg
Mercury-free	Yes
Design / version	Tube

Product remark	Fuse protection with indicated values recommended acc. to IEC60357, EN60357 / For outdoor applications and operation in damp locations special approved fixtures are required / Technical and light values are subject to be changed
----------------	--

Capabilities

Dimmable	Yes
Burning position	Any

Certificates & standards

Energy efficiency class	D
Energy consumption	120.00 kWh/1000h

Country-specific categorizations

ILCOS	HDG-120-240-R7s-114,2
Order reference	64696 ECO

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4008321977717	Folding box 1	126 mm x 18 mm x 21 mm	15.00 g	0.05 dm ³
4008321977724	Shipping box 20	137 mm x 77 mm x 112 mm	306.00 g	1.18 dm ³
4052899401310	SHIPPING BOX FOR 5TH-LEVEL 720			

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.