Lighting

PHILIPS



A ↑ G

G

MASTERColour CDM-R111 Elite

MASTERC CDM-R111 Elite 35W/930 GX8.5 24D

MASTERColour CDM-R111 Elite combines the trendy look of 111 mm aluminumreflector halogen lamps with the long life, high energy efficiency and crisp white light of MASTERColour CDM.

Warnings and Safety

- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/930 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Correlated Color Temperature (Nom)	3000 K
Cap-Base	GX8.5 [GX8.5]	Luminous Efficacy (rated) (Nom)	46 lm/W
Operating Position	UNIVERSAL [Any or Universal (U)]	Color rendering index (CRI)	90
Switching Cycle	1,050	LLMF At End Of Nominal Lifetime (Nor	n) 70 %
Flux measurement reference	Narrow Cone	Luminous Flux in 90° Cone (Rated)	1,750 lumen
Life to 50% Failures (Nom)	12,000 hour(s)		
		Operating and Electrical	
Light Technical		Power Consumption	39.1 W
Color Code	930 [CCT of 3000K]	Warm-up time to 60% light	120 s
Beam Angle (Nom)	24 degree(s)	Voltage (Nom)	89 V
Luminous Flux	1,750 lumen	Voltage (Nom)	89 V
Luminous Intensity (Nom)	8,500 cd		
Color Designation	Warm White (WW)	Controls and Dimming	
Chromaticity Coordinate X (Nom)	0.434	Dimmable	No
Chromaticity Coordinate Y (Nom)	0.398		

MASTERColour CDM-R111 Elite

Mechanical and Housing	
Bulb Finish	Reflector
Bulb Shape	R111 [R 111mm]
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	4.7 mg
Mercury (Hg) Content (Nom)	4.7 mg
Energy Consumption kWh/1000 h	40 kWh
EPREL Registration Number	473280
Product Data	
Full product code	871829168944700

MASTERC CDM-R111 Elite 35W/930 GX8.5 24D		
928195405330		
1		
6		
928195405330		
MASTERC CDM-R111 Elite 35W/930 GX8.5 24D		
8718291689454		
8718291689447		

Dimensional drawing




MASTERC CDM-R111 Elite 35W/930 GX8.5 24D 111 mm 95 mm

D (max)

C (max)

Photometric data

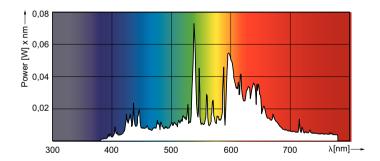

Spectral Power Distribution Colour - MASTERC CDM-R111 Elite 35W/930 GX8.5 24D V1000/ / 1000/ / 1000/

Product

Light Distribution Diagram - MASTERC CDM-R111 Elite 35W/930 GX8.5 24D

MASTERColour CDM-R111 Elite



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2023, October 17 - data subject to change