

## Lamps without halogen, low voltage




### Areas of application


- As film projector lamps




Product family datasheet

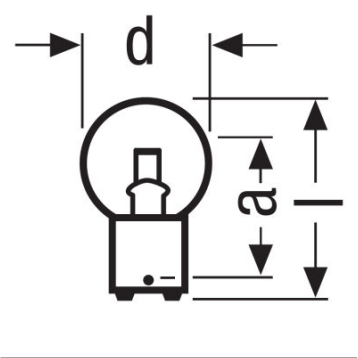


Product line drawing

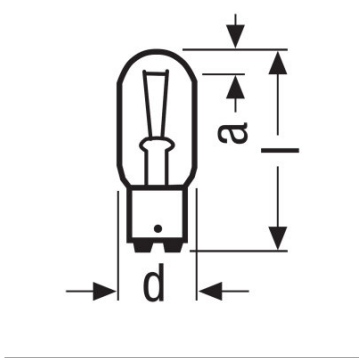


Product line drawing

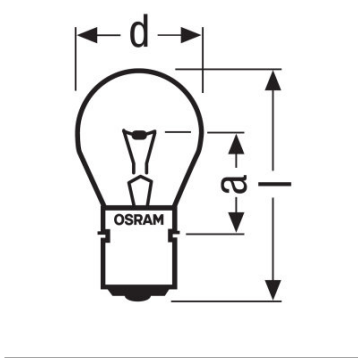

Product line drawing

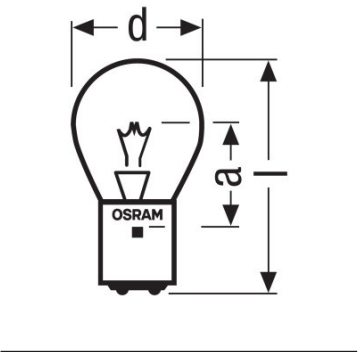

Product line drawing

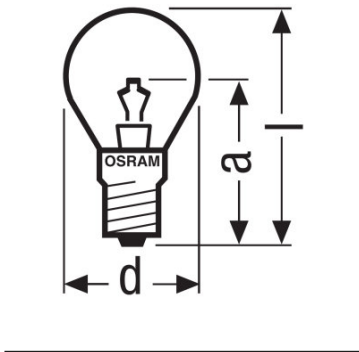

Product line drawing

## Product family datasheet

### Technical data

	Electrical data		Dimensions & weight			Lifespan	Additional product data	Capabilities	Country specific categorizations
Product description	Lamp wattage	Nominal voltage	Diameter	Length	Light center length (LCL)	Lifespan	Base (standard designation)	Burning position	Order reference
8013	10 W	6.0 V	25.0 mm	46.0 mm	30.0 mm	200 h	BA15d	Any	10W 6V BA15D 10
8017	15 W	6.0 V	19.0 mm	54.0 mm	7.0 mm	1000 h	B15d	hs30	8017 15W 6V B15
8018 <sup>1)</sup>	15 W	6.0 V	19.0 mm	52.0 mm	5.0 mm	100 h	B15d		8018 15W 6V B15
8022	50 W	12.0 V	35.0 mm	69.0 mm	39.5 mm	50 h	BA20d	h105	8022 50W 12V BA
8024	40 W	12.0 V	35.0 mm	67.0 mm	30.0 mm	500 h	BA20d	s135	8024 40W 12V BA
8100	30 W	6.0 V	35.0 mm	65.0 mm	35.0 mm	600 h	E14		30W 5V E14 VS10
70313	30 W	6.0 V	35.0 mm	65.3 mm	44.0 mm	200 h	P47d	s	70313
70314	25 W	6.0 V	25.0 mm	69.0 mm	38.5 mm	75 h	P47d	s	70314
70335	28 W	6.0 V	35.0 mm	66.0 mm	37.0 mm	400 h	E14	s	70335

<sup>1)</sup> Flat-core filament, filament area perpendicular to the lamp axis

## Product family datasheet

---

### Application advice

For more detailed application information and graphics please see product datasheet.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.