



# MASTERColour CDM-R111



# MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6

The MASTERColour CDM-R111 combines the trendy look of 111 mm aluminum reflector halogen lamps with the long life, high energy efficiency and crisp white light of MASTERColour CDM.

#### Warnings and Safety

- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Use only with electronic control gear. 35W/830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

- II. 6	
General Information	
Cap-Base	GX8.5 [GX8.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Switching Cycle	1,000
Flux measurement reference	Narrow Cone
Life to 50% Failures (Nom)	11,000 hour(s)
Light Technical	
Color Code	942 [CCT of 4200K]
Beam Angle (Nom)	24 degree(s)
Luminous Flux	2,800 lumen
Luminous Intensity (Nom)	14,300 cd
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	0.371
Chromaticity Coordinate Y (Nom)	0.366

Correlated Color Temperature (Nom) 4200 K  Color rendering index (CRI) 96  LLMF At End Of Nominal Lifetime (Nom) 60 %  Luminous Flux in 90° Cone (Rated) 2,800 lumen  Operating and Electrical  Power Consumption 73.2 W  Warm-up time to 60% light 120 s  Voltage (Nom) 92 V  Voltage (Nom) 92 V  Controls and Dimming  Dimmable No			
LLMF At End Of Nominal Lifetime (Nom) 60 %  Luminous Flux in 90° Cone (Rated) 2,800 lumen  Operating and Electrical  Power Consumption 73.2 W  Warm-up time to 60% light 120 s  Voltage (Nom) 92 V  Voltage (Nom) 92 V  Controls and Dimming	Correlated Color Temperature (Nom)	4200 K	
Luminous Flux in 90° Cone (Rated)  2,800 lumen  Operating and Electrical  Power Consumption  73.2 W  Warm-up time to 60% light  120 s  Voltage (Nom)  92 V  Controls and Dimming	Color rendering index (CRI)	96	
Operating and Electrical  Power Consumption 73.2 W  Warm-up time to 60% light 120 s  Voltage (Nom) 92 V  Voltage (Nom) 92 V  Controls and Dimming	LLMF At End Of Nominal Lifetime (Nom) 60 %		
Power Consumption 73.2 W  Warm-up time to 60% light 120 s  Voltage (Nom) 92 V  Voltage (Nom) 92 V  Controls and Dimming	Luminous Flux in 90° Cone (Rated)	2,800 lumen	
Power Consumption 73.2 W  Warm-up time to 60% light 120 s  Voltage (Nom) 92 V  Voltage (Nom) 92 V  Controls and Dimming			
Warm-up time to 60% light 120 s  Voltage (Nom) 92 V  Voltage (Nom) 92 V  Controls and Dimming	Operating and Electrical		
Voltage (Nom) 92 V Voltage (Nom) 92 V Controls and Dimming	Power Consumption	73.2 W	
Voltage (Nom) 92 V  Controls and Dimming	Warm-up time to 60% light	120 s	
Controls and Dimming	Voltage (Nom)	92 V	
	Voltage (Nom)	92 V	
Dimmable No	Controls and Dimming		
	Dimmable	No	

Datasheet, 2023, October 9 data subject to change

# **MASTERColour CDM-R111**

Mechanical and Housing	
Bulb Finish	Reflector
Bulb Shape	R111 [R 111mm]
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	6.6 mg
Mercury (Hg) Content (Nom)	6.3 mg
Energy Consumption kWh/1000 h	74 kWh
EPREL Registration Number	473360
Product Data	
Full product code	871150021393810


Order product name	MASTERC CDM-R111 70W/942 GX8.5 24D	
	1CT/6	
Order code	928096905330	
Numerator - Quantity Per Pack	1	
Numerator - Packs per outer box	6	
Material Nr. (12NC)	928096905330	
Full product name	MASTERC CDM-R111 70W/942 GX8.5 24D	
	1CT/6	
EAN/UPC - Case	8711500213945	
EAN/UPC - Product/Case	8711500213938	

## Dimensional drawing


Π

Product	D (max)	C (max)
MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6	111 mm	95 mm

## Photometric data




Light Distribution Diagram - MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6

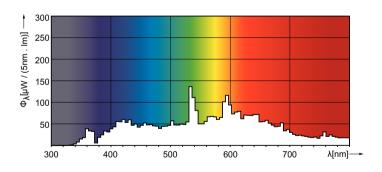


Spectral Power Distribution Colour - MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6

# **MASTERColour CDM-R111**

#### Lifetime

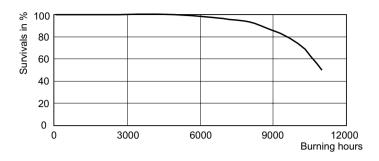

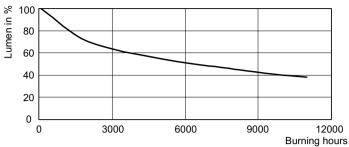

Life Expectancy Diagram - MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6

Lumen Maintenance Diagram - MASTERC CDM-R111 70W/942 GX8.5 24D 1CT/6

