



# MASTERColour CDM-T

MASTERColour CDM-T 250W/830 G12 1CT/12

Range of single-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

## Product data

### • General Information

Cap-Base	G12 [ G12]
Operating Position	UNIVERSAL [ Any or Universal (U)]
Life To 5% Failures (Nom)	3500 h
Life To 10% Failures (Nom)	10000 h
Life To 20% Failures (Nom)	12000 h
Life To 50% Failures (Nom)	15000 h
Ansi Code HID	-

### • Light Technical

Color Code	830 [ CCT of 3000K]
Luminous Flux (Min)	24780 lm
Luminous Flux (Nom)	27540 lm
Color Designation	Warm White (WW)
Lumen Maintenance 10000 h (Nom)	92 %
Lumen Maintenance 2000 h (Nom)	98 %
Lumen Maintenance 5000 h (Nom)	97 %
Chromaticity Coordinate X (Nom)	0.435
Chromaticity Coordinate Y (Nom)	0.393
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	111 lm/W
Color Rendering Index (Nom)	85

### • Operating and Electrical

Power (Rated) (Nom)	249.0 W
Lamp Current Run-Up (Max)	6 A
Lamp Current (EM) (Nom)	2.99 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Ignition Peak Voltage (Min)	3500 V
Re-Ignition Time (Min) (Max)	15 min
Ignition Time (Max)	30 s
Voltage (Max)	103 V
Voltage (Min)	87 V
Voltage (Nom)	95 V

### • Controls and Dimming

Dimmable	No
Run-Up Time 90% (Max)	3 min

### • Mechanical and Housing

Bulb Finish	Clear (CL)
-------------	------------

# PHILIPS

## • Approval and Application

Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	27 mg
Energy Consumption kWh/1000 h	274 kWh

## • UV

Pet (Niosh) (Min)	8 h/500lx
Damage Factor D/fc (Nom)	0.15

## • Luminaire Design Requirements

Bulb Temperature (Max)	700 °C
Cap-Base Temperature (Max)	280 °C

Pinch Temperature (Max) 350 °C

## • Product Data


Full product code	871150020801915
Order product name	MASTERColour CDM-T 250W/830 G12 1CT/12
EAN/UPC - Product	8711500208019
Order code	928089805131
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928089805131
Net Weight (Piece)	0.039 kg
ILCOS Code	MT/UB-250/830-H-G12-25/135

## Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)

- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

## Dimensional drawing

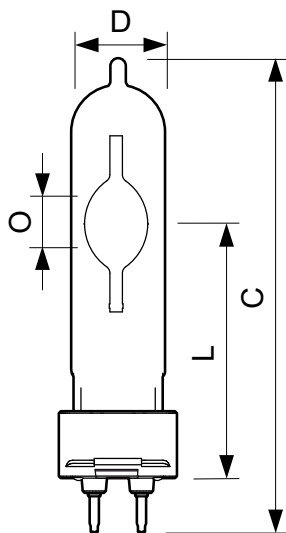


CDM-T 250W


## CDM-T 250W/830 G12

Product	D	O	L	L	L	C
MASTERColour CDM-T 250W/830 G12 1CT/12	25 mm	12.3 mm	71.5 mm	73.5 mm	72.5 mm	135 mm

## Dimensional drawing



## Photometric data

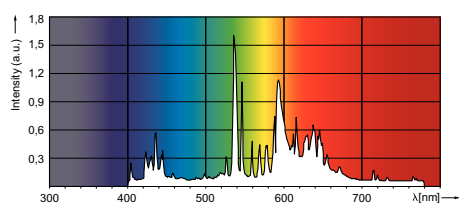

© 2015 Philips Lighting Holding B.V.  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2015, December 28  
data subject to change