

## HBO 100 W/2

HBO | Mercury short-arc lamps without reflector 50...200 W



### Areas of application

- Fluorescence microscopy
- UV curing
- A variety of light guide applications

### Product benefits

- High radiance
- High radiant power in the UV and the visible range

### Product features

- Multi-line spectrum



Technical data

Electrical data

|                 |                         |
|-----------------|-------------------------|
| Nominal wattage | 100.00 W                |
| Lamp wattage    | 100 W                   |
| Lamp voltage    | 17...25 V <sup>1)</sup> |
| Lamp current    | 4.3...5.6 A             |
| Type of current | DC                      |


<sup>1)</sup> Initial electrical values

Photometrical data

|                       |                      |
|-----------------------|----------------------|
| Nominal luminous flux | 2200 lm              |
| Luminous intensity    | 260 cd <sup>1)</sup> |

<sup>1)</sup> Typical initial photometric value

Dimensions & weight

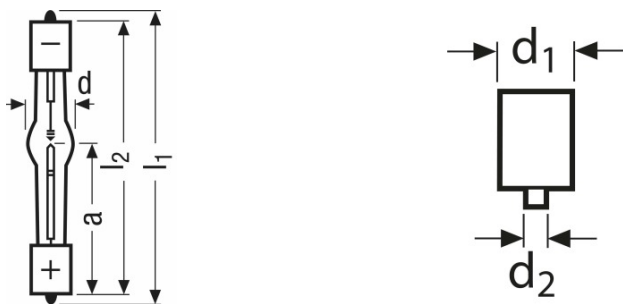

|   |                        |
|---|------------------------|
| Diameter                                    | 10.0 mm                |
| Mounting length                             | 82.0 mm <sup>1)</sup>  |
| Length with base excl. base pins/connection | 82.00 mm <sup>1)</sup> |
| Light center length (LCL)                   | 43.0 mm <sup>2)</sup>  |

<sup>1)</sup> Maximum

<sup>2)</sup> Distance from end of base to tip of anode (cold)

Lifespan

|          |       |
|----------|-------|
| Lifespan | 200 h |
|----------|-------|

Additional product data

|                                     |             |
|-------------------------------------|-------------|
| Base (standard designation)         | SFa7.5/SFa9 |
| Base anode (standard designation)   | SFa9-2      |
| Base cathode (standard designation) | SFa7.5-2    |

Product datasheet

Capabilities

|                  |                   |
|------------------|-------------------|
| Burning position | s90 <sup>1)</sup> |
|------------------|-------------------|

<sup>1)</sup> Anode underneath

Country specific information

| Product code  | METEL code | SEG-No. | STK number | UK Org |
|---------------|------------|---------|------------|--------|
| 4050300507095 | OSRHBO1002 | -       | 4836517    | -      |

## Product datasheet

---

### Safety advice

Because of their high luminance, UV radiation and high internal pressure (when hot) HBO lamps may only be operated in enclosed lamp casings specially constructed for the purpose. Mercury is released if the lamp breaks. Special safety precautions must be taken. More information is available on request or can be found in the leaflet included with the lamp or in the operating instructions.

---

### Logistical Data

| Product code  | Product description | Packaging unit<br>(Pieces/Unit) | Dimensions (length<br>x width x height) | Volume                | Gross weight |
|---------------|---------------------|---------------------------------|---|-----------------------|--------------|
| 4050300507095 | HBO 100 W/2         | Folding carton box<br>1         | 165 mm x 48 mm x<br>95 mm               | 0.75 dm <sup>3</sup>  | 76.25 g      |
| 4050300507101 | HBO 100 W/2         | Shipping carton box<br>10       | 235 mm x 210 mm x<br>225 mm             | 11.10 dm <sup>3</sup> | 953.75 g     |

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

### References / Links

Further technical information on HBO lamps and information for manufacturers of operating equipment can be requested directly from OSRAM.

---

### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.