



Architectural MSD

MSD 575 1CT/16

The high luminous efficacy and optimal lamp filling of the single ended Architectural MSD lamps create high beam intensity and excellent color rendering. While the compact arc of the lamp allows efficient beam control and high intensity. Ideal to illuminate architecture of all types at night.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information	
Cap-Base	GX9.5 [GX9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	3,000 hour(s)
Light Technical	
Color Code	- [Not Specified]
Luminous Flux	43,000 lumen
Chromaticity Coordinate X (Nom)	323
Chromaticity Coordinate Y (Nom)	317
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (Rated) (Min)	68 lm/W
Luminous Efficacy (rated) (Nom)	75 lm/W
Color rendering index (CRI)	72
Operating and Electrical	
Power Consumption	575 W

Lamp Current (Nom)	7.6 A
Controls and Dimming	
Dimmable	No
Product Data	
Full product code	872790091755000
Order product name	MSD 575 1CT/16
Order code	928098805114
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	16
Material Nr. (12NC)	928098805114
Full product name	MSD 575 1CT/16
EAN/UPC - Case	8727900917567
EAN/UPC - Product/Case	8727900917550

Dimensional drawing

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSD 575	30 mm	8.0	64 mm	66 mm	65	125 mm	36 mm	35	34 mm
1CT/16		mm			mm			mm	

Photometric data

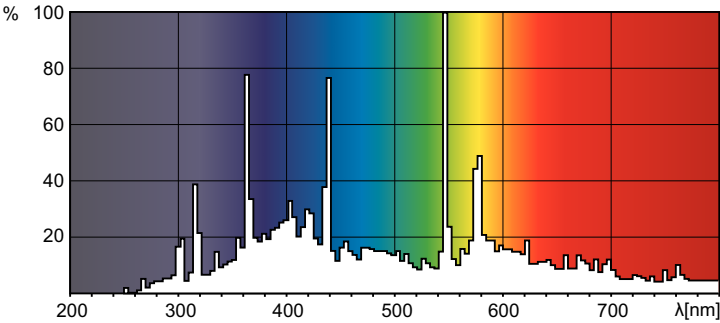

Spectral Power Distribution Colour – MSD 575 1CT/16

