



# **MASTER SDW-T**



# MASTER SDW-T 100W/825 PG12-1 1SL/12

Range of high-efficiency, discharge lamps with warm color to be used in open luminairs

# **Warnings and Safety**

- $\cdot$  Use only with dedicated Philips control gear
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information				
Cap-Base	PG12-1 [PG12-1]			
Operating Position	UNIVERSAL [Any or Universal (U)]			
Flux measurement reference	Sphere			
Life to 50% Failures (Nom)	15,000 hour(s)			
Useful Life (Nom)	10,000 hour(s)			
Light Technical				
Color Code	825 [CCT of 2500K]			
Luminous Flux	5,100 lumen			
Color Designation	Golden White			
Chromaticity Coordinate X (Nom)	0.478			
Chromaticity Coordinate Y (Nom)	0.415			
Correlated Color Temperature (Nom)	2500 K			
Luminous Efficacy (rated) (Nom)	52.58 lm/W			
Color rendering index (CRI)	83			
Operating and Electrical				
Power Consumption	97.0 W			

Voltage (Nom)	97 V
Voltage (Nom)	97 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Hard Glass
Bulb Shape	T31 [T 31mm]
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	11.4 mg
Mercury (Hg) Content (Nom)	11.4 mg
Energy Consumption kWh/1000 h	97 kWh
EPREL Registration Number	473397


Datasheet, 2023, October 10 data subject to change

## **MASTER SDW-T**

Product Data	
Full product code	871150073404415
Order product name	MASTER SDW-T 100W/825 PG12-1 1SL/12
Order code	928154109227
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12


Material Nr. (12NC)	928154109227			
Full product name	MASTER SDW-T 100W/825 PG12-1 1SL/12			
EAN/UPC - Case	8711500831163			
EAN/UPC - Product/Case	8711500734044			

### Dimensional drawing




Product	D (max)	0	L	C (max)
MASTER SDW-T 100W/825 PG12-1 1SL/12	32 mm	18.3 mm	91 mm	149 mm

#### Photometric data





Light Distribution Diagram - MASTER SDW-T 100W/825 PG12-1 1SL/12

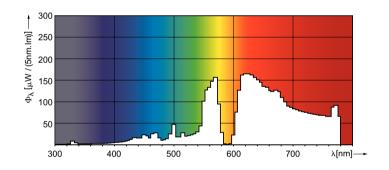

Spectral Power Distribution Colour - MASTER SDW-T 100W/825 PG12-1 1SL/12

#### Lifetime

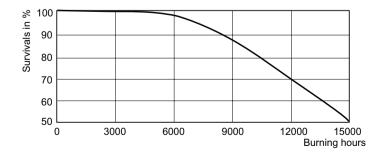

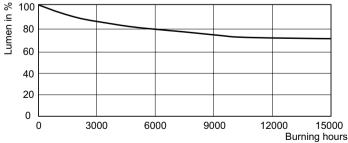

Life Expectancy Diagram - MASTER SDW-T 100W/825 PG12-1 1SL/12

Lumen Maintenance Diagram - MASTER SDW-T 100W/825 PG12-1 1SL/12

# **MASTER SDW-T**



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.