



MASTER TL-D 90 De Luxe

MASTER TL-D 90 De Luxe 18W/940 SLV/10

This TL-D lamp makes colors appear rich, deep and enhanced in a natural way. Thus very suitable for applications where a high color recognition is needed: first aid and treatment rooms in hospitals, printing rooms, jewelry, dentists, hairdressing, museums and shops

Product data

• General Information

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	12000 h
Life To 50% Failures (Nom)	15000 h
Life To 50% Failures Preheat (Nom)	20000 h

• Light Technical

Color Code	940 [CCT of 4000K]
Luminous Flux (Nom)	1200 lm
Luminous Flux (Rated) (Nom)	1200 lm
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	381
Chromaticity Coordinate Y (Nom)	379
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	66.7 lm/W
Color Rendering Index (Nom)	91

• Operating and Electrical

Power (Rated) (Nom)	18.0 W
Lamp Current (Nom)	0.360 A

• Temperature

Design Temperature (Nom)	25 °C
--------------------------	-------

• Controls and Dimming

Dimmable	Yes
----------	-----

• Approval and Application

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	22 kWh

• Product Data

Full product code	871150088839625
Order product name	MASTER TL-D 90 De Luxe 18W/940 SLV/10
EAN/UPC - Product	8711500888396
Order code	928043594081
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	928043594081
Net Weight (Piece)	68.900 g
ILCOS Code	FD-18/38/1A-E-G13

PHILIPS


MASTER TL-D 90 De Luxe

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and

remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

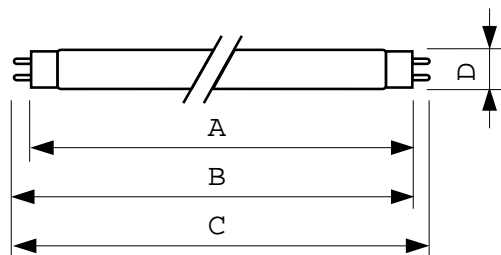



TL-D De Luxe 18W/940

Product	D	A	B	B	C
MASTER TL-D 90 De Luxe 18W/940 SLV/10	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

G13, T8



Photometric data

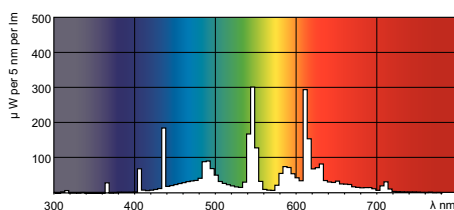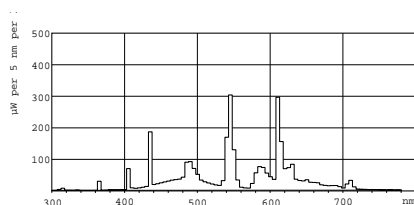

© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change