



# MASTER TL-D Food

## MASTER TL-D Food 58W/79 SLV/25

The TL-D Food lamp makes the appearance of meat and bakery products more fresh and tasty. It can be applied for food illumination in butcher shops, bakeries, supermarkets etc.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


| General Information                |                                 |
|------------------------------------|---------------------------------|
| Cap-Base                           | G13 [Medium Bi-Pin Fluorescent] |
| Life to 50% Failures (Nom)         | 15,000 hour(s)                  |
| Light Technical                    |                                 |
| Color Code                         | 79                              |
| Luminous Flux                      | 2,800 lumen                     |
| Color Designation                  | Food                            |
| Correlated Color Temperature (Nom) | 3800 K                          |
| Luminous Efficacy (rated) (Nom)    | 48 lm/W                         |
| Color rendering index (CRI)        | 74                              |
| Operating and Electrical           |                                 |
| Power Consumption                  | 58.5 W                          |
| Lamp Current (Nom)                 | 0.670 A                         |
| Voltage (Nom)                      | 111 V                           |
| Voltage (Nom)                      | 111 V                           |

| Controls and Dimming            |                                |
|---------------------------------|--------------------------------|
| Dimmable                        | Yes                            |
| Mechanical and Housing          |                                |
| Bulb Shape                      | T8 [26 mm (T8)]                |
| Approval and Application        |                                |
| Mercury (Hg) Content (Nom)      | 5.0 mg                         |
| Energy Consumption kWh/1000 h   | 69 kWh                         |
| Product Data                    |                                |
| Full product code               | 871150070623240                |
| Order product name              | MASTER TL-D Food 58W/79 SLV/25 |
| Order code                      | 928049002043                   |
| Numerator - Quantity Per Pack   | 1                              |
| Numerator - Packs per outer box | 25                             |
| Material Nr. (12NC)             | 928049002043                   |
| Full product name               | MASTER TL-D Food 58W/79 SLV/25 |
| EAN/UPC - Case                  | 8711500613165                  |

MASTER TL-D Food


|                        |               |
|------------------------|---------------|
| EAN/UPC - Product/Case | 8711500706232 |
|------------------------|---------------|

Dimensional drawing

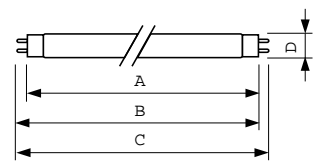


| Product                        | D (max) | A (max)  | B (max)    | B (min)    | C (max)    |
|--------------------------------|---------|----------|------------|------------|------------|
| MASTER TL-D Food 58W/79 SLV/25 | 28 mm   | 1,500 mm | 1,507.1 mm | 1,504.7 mm | 1,514.2 mm |

Photometric data

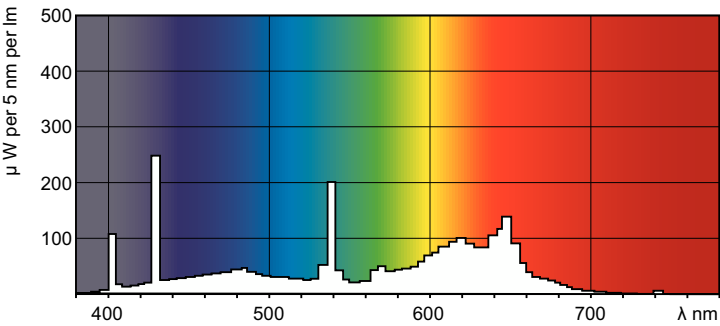

Spectral Power Distribution Colour - MASTER TL-D Food 58W/79 SLV/25

Lifetime

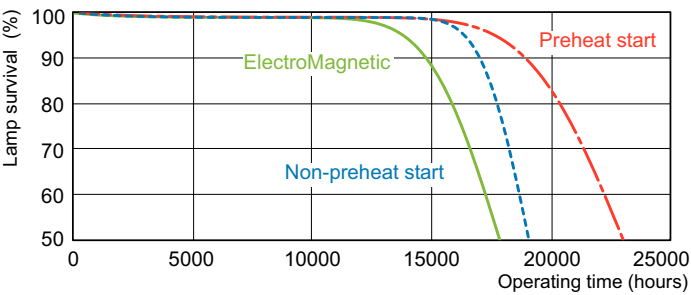


Life Expectancy Diagram - MASTER TL-D Food 58W/79 SLV/25

Life Expectancy Diagram - MASTER TL-D Food 58W/79 SLV/25

MASTER TL-D Food

Lifetime

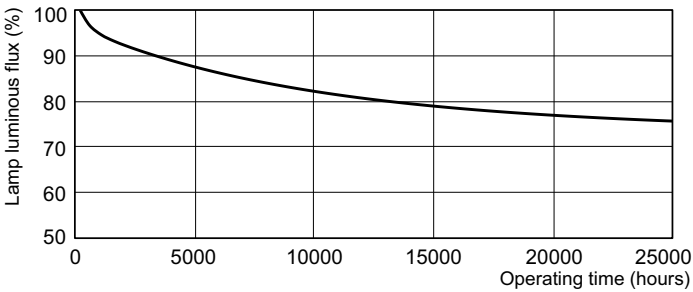

Lumen Maintenance Diagram - MASTER TL-D Food 58W/79 SLV/25

