



# HF-Matchbox Blue

## HF-M BLUE 121 LH TL5 230-240V


HF-Matchbox Blue is an affordable, reliable, compact, lightweight and high-frequency ballast for use with system wattages below 25 W in combination with TL mini, TL-D, TL5 and TL5c, PL-T/C, and PL-L/S lamps. The HF-M Blue range has a robust design, meets all relevant international safety and performance standards and has an energy efficiency index (CELMA EEI ) of A2. The ballast is primarily designed for Indoor application. For outdoor application, the luminaire should be minimum Classland need to be sufficiently protected against water & dust. The installation should also be guard against any lightening surge or any other necessary electrical protection as deemed in such typical installation & application.

### Product data

Operating and Electrical		Mechanical and Housing	
Input Voltage	230 to 240 V	Housing	LH
Line Frequency	50 to 60 Hz	Approval and Application	
Input Frequency	50 to 60 Hz	Ingress protection code	IP20 [Finger-protected]
Number of Products on MCB (16A Type B) (Nom)	59	Approval Marks	F-Marking CE marking VDE certificate CB Certificate
Wiring		Product Data	
Connector Type Input Terminals	Insert	Full product code	871150053646430
Color Input Terminals	Gray	Order product name	HF-M BLUE 121 LH TL5 230-240V
Color Output Terminals	Grey	Order code	913700418366
Connector Type Output Terminals	Insert	Numerator - Quantity Per Pack	1
Cable Length From Device to Lamp	1.50 m	Numerator - Packs per outer box	50
Temperature		Material Nr. (12NC)	913700418366
Ambient temperature range	-10 °C to 40 °C	Full product name	HF-M BLUE 121 LH TL5 230-240V
T-Case Maximum (Max)	75 °C	EAN/UPC - Case	8711500536471
		EAN/UPC - Product/Case	8711500536464

# HF-Matchbox Blue

## Dimensional drawing

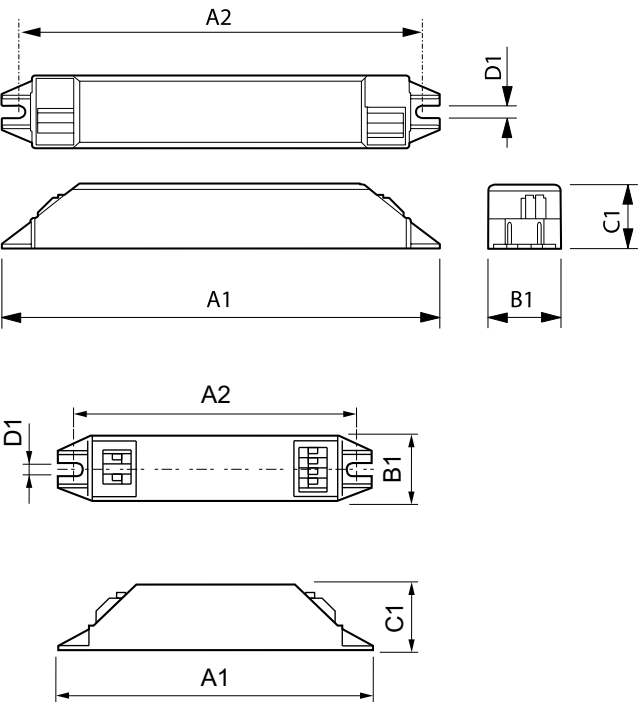

Product	A1	A2	B1	C1	D1
HF-M BLUE 121 LH TL5 230-240V	187 mm	180 mm	22 mm	22 mm	4.4 mm

Product
HF-M BLUE 121 LH TL5 230-240V

