



# Actinic BL TL-D(K) Secura

## Actinic BL TL-D 18W/10 Secura 1SL/25

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL-D(K) Secura lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. In addition, they have a special "Secura" sleeve that keeps all glass and components together in the case of accidental breakage. This eliminates the risk of glass splinters showering down on food preparation areas, for example. And that is why it meets the strict HACCP requirements. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	13,000 hour(s)
Useful Life (Nom)	9,000 hour(s)
Light Technical	
Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	220
Chromaticity Coordinate Y (Nom)	200
UV Depreciation at 2000 h	20 %

UV Depreciation at 5000 h	30 %
Operating and Electrical	
Power Consumption	18 W
Lamp Current (Nom)	0.36 A
Voltage (Nom)	59 V
Voltage (Nom)	59 V
Mechanical and Housing	
Bulb Shape	T26 [T 26mm]


# Actinic BL TL-D(K) Secura

Approval and Application	
Mercury (Hg) Content (Nom)	5.0 mg
UV	
UV-A Radiation 100Hr (IEC)	4.5 W
Product Data	
Full product code	872790085383400
Order product name	Actinic BL TL-D 18W/10 Secura 1SL/25


Order code	928048201003
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928048201003
Full product name	Actinic BL TL-D 18W/10 Secura 1SL/25
EAN/UPC - Case	8727900853841
EAN/UPC - Product/Case	8727900853834

## Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 18W/10 Secura 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm



## Photometric data

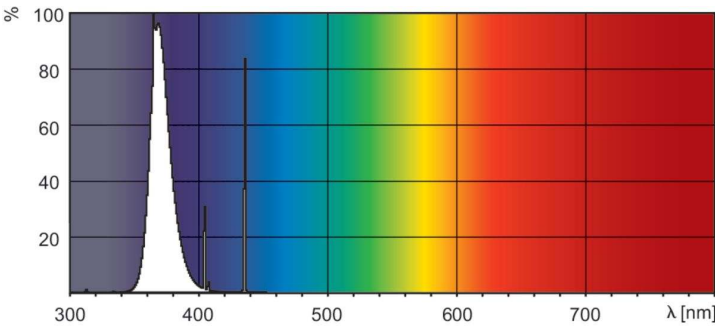

Spectral Power Distribution Colour - Actinic BL TL-D 18W/10 Secura 1SL/25

