



MASTER TL5 High Output Secura



MASTER TL5 HO Secura 54W/840 UNP/40

This TL5 High Output Secura lamp (tube diameter 16 mm) has a protective coating that keeps glass and lamp components together in the event of accidental breakage. The lamp is easily identifiable by a blue ring at one end. Application areas are all places where glass shatters can disturb operations and can have an impact on product and people safety, e.g. the food and beverage industry. This lamp is compliant with HACCP regulations and supports HACCP certification.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- In order to ensure the integrity of the coating, it is strongly recommended to replace Secura lamps before or at the moment the specified lamp life (50% failures @ 3 hrs switching cycle) is reached.

Product data

General Information			
Cap-Base	G5 [G5]		
Flux measurement reference	Sphere		
Light Technical			
Color Code	840 [CCT of 4000K]		
Luminous Flux	4,425 lumen		
Color Designation	Cool White (CW)		
Chromaticity Coordinate X (Nom)	0.38		
Chromaticity Coordinate Y (Nom)	0.38		
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	83 lm/W		

Color rendering index (CRI)	80			
Operating and Electrical				
Power Consumption	53.8 W			
Lamp Current (Nom)	0.455 A			
Controls and Dimming				
Dimmable	Yes			
Mechanical and Housing				
Bulb Shape	T5 [16 mm (T5)]			


Datasheet, 2023, October 9 data subject to change

MASTER TL5 High Output Secura

Approval and Application			
Energy Efficiency Class	G		
Mercury (Hg) Content (Nom)	1.2 mg		
Energy Consumption kWh/1000 h	54 kWh		
EPREL Registration Number	423566		
Product Data			
Full product code	871150095231855		
Order product name	MASTER TL5 HO Secura 54W/840 UNP/40		


Order code	927929184018
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	40
Material Nr. (12NC)	927929184018
Full product name	MASTER TL5 HO Secura 54W/840 UNP/40
EAN/UPC - Case	8711500952325
EAN/UPC - Product/Case	8711500952318

Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO Secura	17 mm	1,149.0 mm	1,156.1 mm	1,153.7 mm	1,163.2 mm
54W/840 UNP/40					


Photometric data

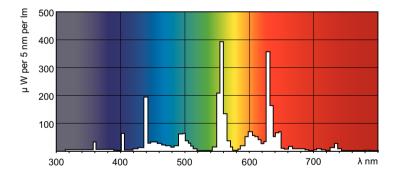


Spectral Power Distribution Colour - MASTER TL5 HO Secura 54W/840 UNP/40

MASTER TL5 High Output Secura


Lifetime

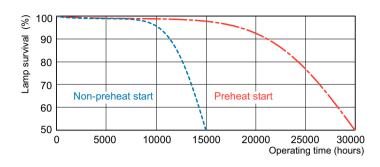



Life Expectancy Diagram - MASTER TL5 HO Secura 54W/840 UNP/40

Life Expectancy Diagram - MASTER TL5 HO Secura 54W/840 UNP/40

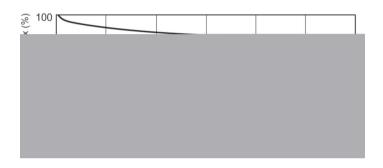

Lumen Maintenance Diagram - MASTER TL5 HO Secura 54W/840 UNP/40



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.