

SIG 1206

Low-voltage over-pressure single-coil lamps, railway



Areas of application

- Railway traffic signalling systems

Product benefits

- Narrow geometrical tolerances for safe operation of the signal installation
- Exact light centre position for optimum adjustment in the equipment
- Long lamp lifetime for efficient operation of signalling systems
- High reliability to avoid expensive delays to train schedules



Technical data


Electrical data

Nominal wattage	6.00 W
Nominal voltage	12.0 V
Test voltage	12 V

Photometrical data

Nominal luminous flux	55 lm
-----------------------	-------

Dimensions & weight

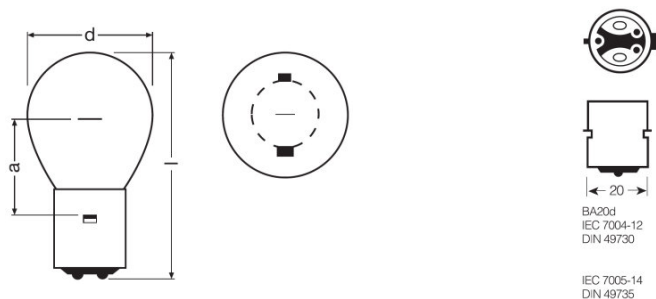

Diameter	36.0 mm
Overall length	67.0 mm
Light center length (LCL)	29.6 mm ¹⁾

¹⁾ Distance from the coil to the lug of base

Lifespan

Nominal lamp life time	600 h ¹⁾
------------------------	---------------------

¹⁾ Average lifespan at test voltage/current

Additional product data

Base (standard designation)	BA20d ¹⁾
Product remark	Available on request/Not for new designs

¹⁾ One base contact is a blind contact

Capabilities

Burning position	Any ¹⁾
------------------	-------------------

¹⁾ Lamps with transverse filaments should only be inclined perpendicular to the filament plane

Country specific categorizations

Product datasheet

Order reference	SIG 1206 CL 6W
-----------------	----------------

Product datasheet

Safety advice

Use only in signal equipment/luminaires that are specially designed for the purpose.
Protect the lamps against moisture during operation and installation.

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300832869	SIG 1206	Unpacked 1	- x - x -		18.10 g
4050300203058	SIG 1206	Folding carton box 10	- x - x -		
4050300203065	SIG 1206	Shipping carton box 100	410 mm x 205 mm x 170 mm	14.29 dm ³	2540.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.