

# PRODUCT DATASHEET

## DST STICK 11 W/2700 K 220...240 V E27

OSRAM DULUX STICK | Compact fluorescent integrated, stick shape



### AREAS OF APPLICATION

- High-quality domestic and professional environments
- General illumination
- Outdoor use in enclosed and ventilated luminaires only

### PRODUCT BENEFITS

- Excellent price/performance ratio
- Great variety of light colors

### PRODUCT FEATURES

- Good quality of light; color rendering index  $R_a: \geq 80$ ; constant chromaticity
- Average life: 10,000 h



## TECHNICAL DATA


### Electrical data

Nominal wattage	11.00 W
Rated wattage	11.00 W
Nominal voltage	220...240 V
Operating frequency	50...60 Hz

### Photometrical data

Nominal luminous flux	600 lm
Rated luminous flux	600 lm
Rated color temperature	2700 K
Light color	2700
Light color (designation)	Warm White
Color rendering index Ra	≥80
Color temperature	2700 K
Luminous flux	600 lm
Color rendering index Ra	≥80
Color rendering group	1B

### Dimensions & weight



Maximum diameter	41.0 mm
Overall length	124.0 mm
Product weight	55.00 g
Length	124.0 mm

### Temperatures & operating conditions

Ambient temperature range	-10...+50 °C
---------------------------	--------------

### Lifespan

Nominal lamp life time	10000 h
Rated lamp life time	10000 h

Additional product data

Light colors, color rendering properties and Light Color Coordinates for OSRAM DULUX® - lamps with integrated control gear

Light Color LUMBLUX®	Color Rendering Index (CRI), Ra	Target Color Coordinate X	Target Color Coordinate Y	Color Temperature [K]	
825 Warm Comfort Light	≥ 80	0.485	0.427	2500	
827 Warm White	≥ 80	0.463	0.420	2700	
840 Cool White	≥ 80	0.380	0.380	4000	
865 Cool Daylight	≥ 80	0.313	0.337	6500	

1. Datenebene / DRG CODE: Initial  
Technische Zeichnung: T17000-LUX

OSRAM

Luminous intensity distribution

Base (standard designation)	E27
Mercury content	2.0 mg
Show WEEE picto	Yes

Capabilities

Dimmable	No
----------	----


Certificates & standards

Energy efficiency class	A
Energy consumption	11 kWh/1000h
Energy efficiency class	A
Cleaning instruction in case of breakage	What to do if a lamp containing mercury breaks?

Country-specific categorizations

ILCOS	FBT-11/827-220/240-E27
-------	------------------------

## Light Distribution

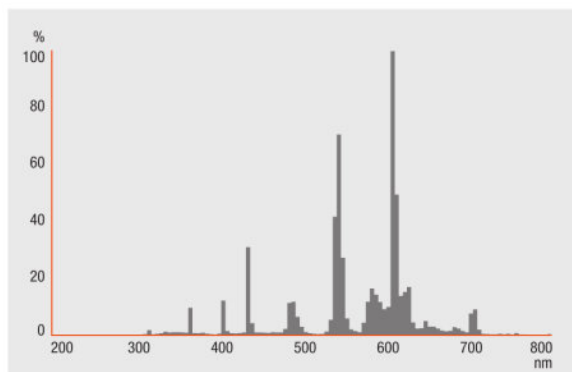

Spectral power distribution

## SAFETY ADVICE

- In case of lamp breakage: [www.ledvance.com/brokenlamp](http://www.ledvance.com/brokenlamp)  
Not for use with external dimmers or electronic switches.

## LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321363794	DST STICK 11 W/2700 K 220...240 V E27	Shipping carton box 10	240 mm x 143 mm x 139 mm	4.77 dm <sup>3</sup>	957.33 g
4008321363794	DST STICK 11 W/2700 K 220...240 V E27	Shipping carton box 30	345 mm x 265 mm x 160 mm	14.63 dm <sup>3</sup>	2360.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.