



# MASTER LEDtube InstantFit HF T5



## MAS LEDtube HF 1500mm HE 20W 865 T5

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance, which cannot be distinguished from traditional fluorescent. These T5 lighting tubes are the right choice for absolute performance and are designed to stand up to everyday conditions. Unparalleled savings thanks to low energy consumption and an exceptionally long lifetime make these T5 LED tubes the choice for every demanding application.

### Product data

General Information	
Cap-Base	G5 [G5]
Nominal lifetime	60,000 hour(s)
Switching Cycle	50,000
Lighting Technology	LED
Flux measurement reference	Sphere
CE mark	Yes
EU RoHS compliant	Yes
Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	200 degree(s)
Luminous Flux	3,000 lumen
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	150 lm/W
Color Consistency	<6
Color rendering index (CRI)	80


LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG0
Operating and Electrical	
Line Frequency	30K to 100K Hz
Input Frequency	30K to 100K Hz
Power Consumption	20 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.92
Voltage (Nom)	80-130 V
LED alternative to fluorescent lamp power	35 W
Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	65 °C

# MASTER LEDtube InstantFit HF T5

Controls and Dimming	
Dimmable	Yes - Check ballast compatibility
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	1,500 mm
Bulb Shape	Tube, double-ended
Approval and Application	
Energy Efficiency Class	D
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	20 kWh
EPREL Registration Number	1384139



Product Data	
Full product code	871869674339300
Order product name	MAS LEDtube HF 1500mm HE 20W 865 T5
Order code	929001391502
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929001391502
Full product name	MAS LEDtube HF 1500mm HE 20W 865 T5
EAN/UPC - Case	8718696743409
EAN/UPC - Product/Case	8718696743393

## Dimensional drawing

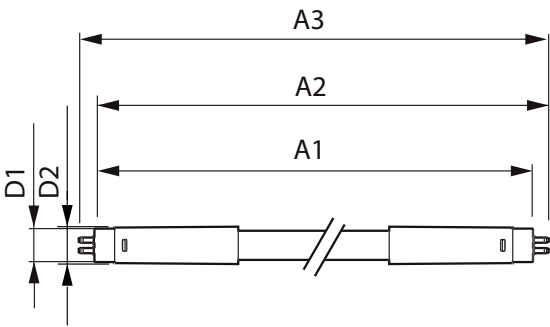

Product	D1	D2	A1	A2	A3
MAS LEDtube HF 1500mm HE 20W 865 T5	15.5 mm	18.8 mm	1,449 mm	1,456.1 mm	1,463.2 mm

## Photometric data

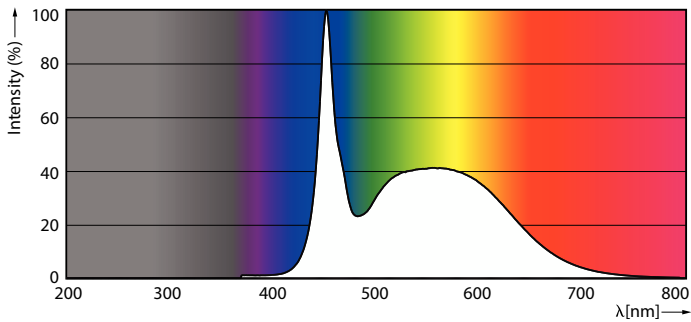


General uniform lighting - MAS LEDtube HF 1500mm HE 20W 865 T5

Spectral Power Distribution Colour - MAS LEDtube HF 1500mm HE 20W 865 T5

# MASTER LEDtube InstantFit HF T5


## Photometric data



Light Distribution Diagram - MAS LEDtube HF 1500mm HE 20W 865 T5


## Lifetime

Life Expectancy Diagram - MAS LEDtube HF 1500mm HE 20W 865 T5

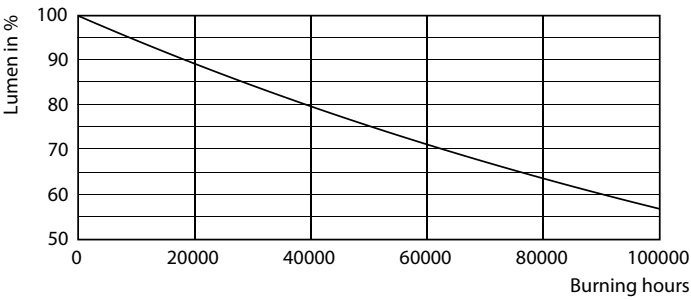

Lumen Maintenance Diagram - MAS LEDtube HF 1500mm HE 20W 865 T5


Life Expectancy Diagram - MAS LEDtube HF 1500mm HE 20W 865 T5

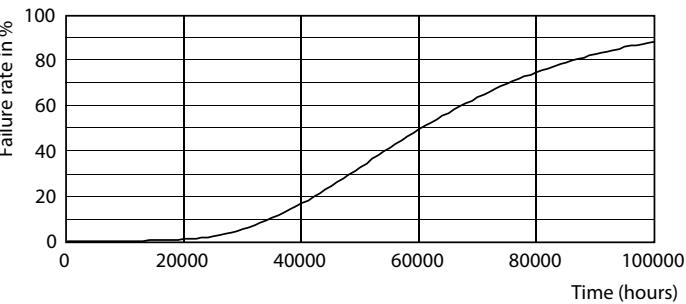

Life Expectancy Diagram - MAS LEDtube HF 1500mm HE 20W 865 T5

MASTER LEDtube InstantFit HF T5

Lifetime

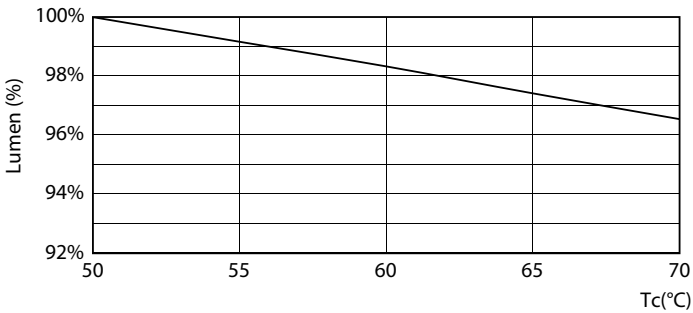

Lumen Maintenance Diagram - MAS LEDtube HF 1500mm HE 20W 865 T5

