




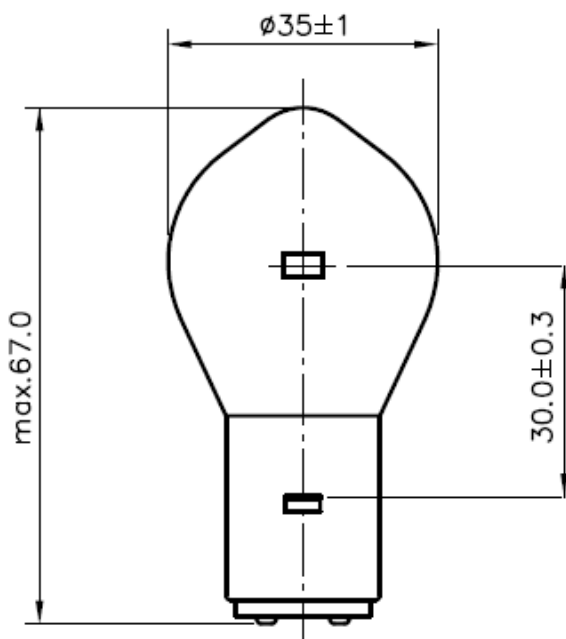
## Railway Signaling

	<b>Type RS6040</b> <b>12V 20W BA20d</b>
	<b>Ordering – No.</b> <b>46040</b>
<b>Product Description</b>	Signaling Lamp
<b>Features</b>	Single Filament
<b>Applications</b>	Railway Signal

## Technical Details

Type	RS6040
Rated Voltage (V)	12
Wattage (W) (at 12V)	max. 21,4
Luminous Flux (lm) (at 12V)	280 ± 10%
Lumen Maintenance (at 12V)	70% at 1500 h
Average Lifetime (h) (at 12V)	2000
Base	BA20d
Maximum Overall Length (mm)	max. 67,0
Bulb Diameter (mm)	max. 35,0 ± 1,0
Light Center Length (mm)	30,0 ± 0,3
Packaging Configuration	200
Environmental Remark	Product don't contain lead or mercury and is conform with Directive 2011/65/EC "Restriction of the use of certain hazardous substances in electrical and electronic equipment".

## Drawing (in mm)



valid from	10.02.2014—V2—PN14/0072
replace for	28.01.2013—V1
file	46040.100.pdf