

# PRODUCT DATASHEET

## ST PAR 16 35 36° 3.3 W/2700 K GU10

LED STAR PAR16 | LED reflector lamps PAR16 with retrofit pin base



### AREAS OF APPLICATION

- Shops
- Hospitality
- Museums, art galleries
- Residential interiors
- As a downlight for marking walkways, doors, stairs, etc.
- Spotlighting for accents
- Spotlighting heat-sensitive objects such as food, plants, etc.
- Outdoor applications only in suitable luminaires

### PRODUCT BENEFITS

- Low energy consumption
- Easy replacement of halogen lamps due to compact full glass design and single optic
- Instant 100 % light, no warm-up time
- Ideal for economical spotlighting

### PRODUCT FEATURES

- LED alternative to conventional high voltage lamps
- Mercury-free lamps
- Made in Germany



## TECHNICAL DATA

### Electrical data

Rated wattage	3.30 W
Nominal wattage	3.30 W
Nominal voltage	220...240 V
Claimed equiv. conventional lamp power	35 W
Max. lamp no. on circuit break. 10 A (B)	20
Max. lamp no. on circuit break. 16 A (B)	32
Operating frequency	50...60 Hz
Power factor $\lambda$	> 0.40

### Photometrical data

Luminous intensity [PIM]	565 cd
Nominal luminous flux	230 lm
Rated luminous flux	230 lm
Rated color temperature	2700 K
Lumen main.fact.at end of nom.life time	0.70
Light color (designation)	Warm White
Color temperature	2700 K
Luminous flux	230 lm
Color rendering index Ra	≥80
Standard deviation of color matching	≤6 sdcn
Color rendering index Ra	≥80
Nominal useful luminous flux 90°	230 lm
Rated useful luminous flux 90°	230 lm
Rated peak intensity	500 cd

### Light technical data

Beam angle	36 °
Warm-up time (60 %)	< 0.50 s
Starting time	< 0.5 s
Nominal beam angle	36 °
Rated beam angle (half peak value)	36.00 °

## Dimensions & weight



<b>Overall length</b>	55.0 mm
<b>Diameter</b>	51.0 mm
<b>Outer bulb</b>	PAR51
<b>Length</b>	55.0 mm
<b>Maximum diameter</b>	51.0 mm

## Temperatures & operating conditions

<b>Maximum temperature at tc test point</b>	70 °C
---	-------

## Lifespan

<b>Nominal lamp life time</b>	15000 h
<b>Rated lamp life time</b>	15000 h
<b>Number of switching cycles</b>	100000

## Additional product data

<b>Base (standard designation)</b>	GU10
<b>Mercury content</b>	0.0 mg
<b>Mercury-free</b>	Yes
<b>Show WEEE picto</b>	Yes
<b>Product remark</b>	All technical parameters apply to the entire lamp/Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value

## Capabilities

<b>Dimmable</b>	No
-----------------	----

## Certificates & standards


<b>Energy efficiency class</b>	A+
--------------------------------	----

<b>Energy efficiency class</b>	A+
<b>Energy consumption</b>	4 kWh/1000h

## Country-specific categorizations

<b>ILCOS</b>	DRPAR-2,6/840-220-240-GU10-50/36
<b>Order reference</b>	LSPAR163536 3,3

## Light Distribution

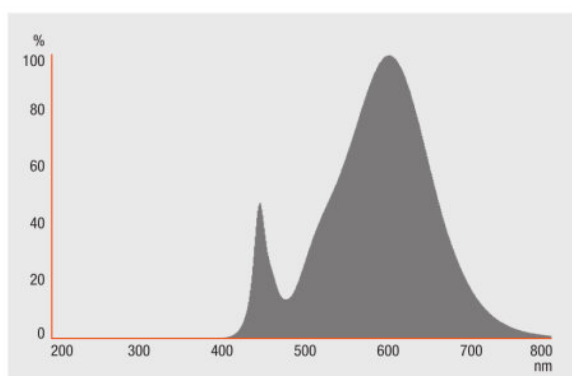

## Spectral power distribution

## LOGISTICAL DATA

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899388178	ST PAR 16 35 36° 3.3 W/2700 K GU10	Shipping carton box 20	290 mm x 254 mm x 134 mm	9.87 dm <sup>3</sup>	1164.00 g
4052899388192	ST PAR 16 35 36° 3.3 W/2700 K GU10	Shipping carton box 30	506 mm x 148 mm x 199 mm	14.90 dm <sup>3</sup>	1658.00 g
4052899958036	ST PAR 16 35 36° 3.3 W/2700 K GU10	Shipping carton box 10	290 mm x 254 mm x 134 mm	9.87 dm <sup>3</sup>	720.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

## REFERENCES / LINKS

For further products and actual information concerning LED lamps see

▶ [www.ledvance.com/ledlamps](http://www.ledvance.com/ledlamps)

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

## DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.