



Ledinaire floodlight

BVP155 LED157/840 PSU 150W VWB CE

LED module 15000 lm - 840 neutral white - Power supply unit -
Very wide beam angle 100°

The Ledinaire range contains a selection of popular off-the-shelf LED luminaires that comes with the Philips high quality levels at a competitive price. Reliable, energy-efficient and affordable – just what you need.

Product data


General Information	
Lamp family code	LED150 [LED module 15000 lm]
Light source color	840 neutral white
Light source replaceable	No
Number of gear units	-
Driver/power unit/transformer	Power supply unit
Driver included	Yes
Optical cover/lens type	Clear glass
Luminaire light beam spread	100°
Control interface	-
Connection	Flying leads/wires
Cable	Cable 1.0 m without plug
Protection class IEC	Safety class I
Flammability mark	-
CE mark	CE mark
ENEC mark	-
Warranty period	3 years
Optic type outdoor	Very wide beam angle 100°
Constant light output	No
Number of products on MCB of 16 A type B	15

RoHS mark	RoHS mark
Light source engine type	LED
Light Technical	
Upward light output ratio	0
Standard tilt angle posttop	0°
Standard tilt angle side entry	0°
Operating and Electrical	
Input Voltage	220 to 240 V
Input Frequency	50 or 60 Hz
Initial CLO power consumption	- W
Average CLO power consumption	- W
End CLO power consumption	- W
Inrush current	3.52 A
Inrush time	0.0254 ms
Power Factor (Min)	0.9

Ledinaire floodlight

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Housing Material	Aluminum die cast
Reflector material	Polycarbonate
Optic material	Polycarbonate
Optical cover/lens material	Glass
Fixation material	Steel
Mounting device	Mounting bracket adjustable
Optical cover/lens shape	Flat
Optical cover/lens finish	Clear
Overall length	310 mm
Overall width	60 mm
Overall height	380 mm
Effective projected area	0.11 m²
Color	Aluminum and gray
Approval and Application	
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]
Mech. impact protection code	IK08 [5 J vandal-protected]
Surge Protection (Common/Differential)	Luminaire surge protection level until 4 kV differential mode and 4 kV common mode
Initial Performance (IEC Compliant)	
Initial luminous flux (system flux)	15750 lm
Luminous flux tolerance	+/-10%
Initial LED luminaire efficacy	105 lm/W

Dimensional drawing

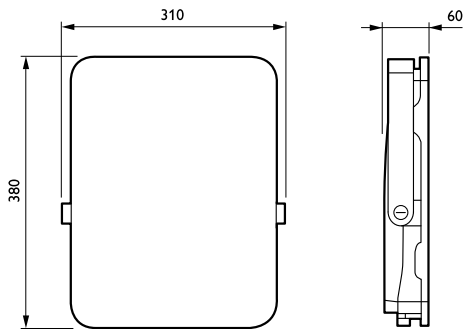

Ledinaire floodlight BVP105/106

Init. Corr. Color Temperature	4000 K
Init. Color Rendering Index	80
Initial chromaticity	<7 SDCM
Initial input power	150 W
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life	10 %
50000 h	
Useful life L80B10	32000 h
Lumen maintenance at median useful life*	L70
50000 h	
Application Conditions	
Ambient temperature range	-25 to +40 °C
Maximum dim level	Not applicable
Product Data	
Full product code	871016333126399
Order product name	BVP155 LED157/840 PSU 150W VWB CE
EAN/UPC - Product	8710163331263
Order code	911401733282
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	2
Material Nr. (12NC)	911401733282
Net Weight (Piece)	4.900 kg



Ledinaire floodlight

