

# MASTER Value LEDtube T8



## MAS LEDtube VLE 600mm HO 8W 865 T8

A high-performance LED solution, the professional MASTER Value LED tube is ideal for replacing T8 fluorescent lamps using EM ballast or installing directly on the mains. This product provides an optimal combination of value and performance — for use in all general lighting, office, industry, retail, and hospitality applications. The unique design of this LED T8 tube light offers wide compatibility, safety and fast installation, as well as instant energy savings.

#### **Product data**

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Nominal lifetime	60,000 hour(s)
Switching Cycle	200,000
Lighting Technology	LED
Flux measurement reference	Sphere
CE mark	Yes
EU RoHS compliant	Yes
Light Technical	
Color Code	865 [CCT of 6500K]
Beam Angle (Nom)	190 degree(s)
Luminous Flux	1,050 lumen
Color Designation	Cool Daylight
Correlated Color Temperature (Nom)	6500 K
Luminous Efficacy (rated) (Nom)	131 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %

Flickering value (PstLM)	1
Stroboscopic effect value (SVM)	0.4
Photobiological safety according to EN 6247	71 RG0
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	8 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
LED alternative to fluorescent lamp power	18 W
	<u> </u>
Temperature	<u> </u>
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	55 ℃


Datasheet, 2023, October 13 data subject to change

# **MASTER Value LEDtube T8**

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Material	Glass
Product Length	600 mm
Bulb Shape	Tube, double-ended
Approval and Application	
Energy Efficiency Class	E
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA
	Keur certificate
Energy Consumption kWh/1000 h	8 kWh
EPREL Registration Number	1095864

Product Data	
Full product code	871869964683700
Order product name	MAS LEDtube VLE 600mm HO 8W 865
	Т8
Order code	929002021302
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002021302
Full product name	MAS LEDtube VLE 600mm HO 8W 865
	Т8
EAN/UPC - Case	8718699646844
EAN/UPC - Product/Case	8718699646837

## Dimensional drawing

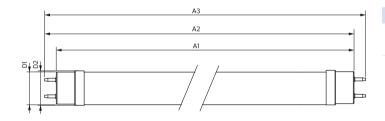



 Product
 D1
 D2
 A1
 A2
 A3

 MAS LEDtube VLE 600mm HO 8W
 25.8 mm
 588.5 mm
 595.5 mm
 602.5 mm

 865 T8

## Photometric data

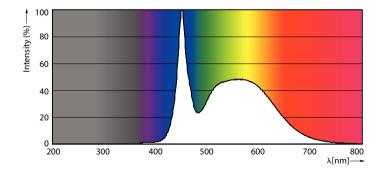




Spectral Power Distribution Colour - MAS LEDtube VLE 600mm HO 8W 865 T8  $\,$ 

General uniform lighting - MAS LEDtube VLE 600mm HO 8W 865 T8


# **MASTER Value LEDtube T8**

### Photometric data




Light Distribution Diagram - MAS LEDtube VLE 600mm HO 8W 865 T8

### Lifetime

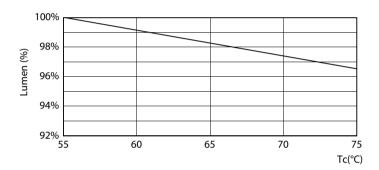

Lumen Maintenance Diagram - MAS LEDtube VLE 600mm HO 8W 865 T8

#### Life Expectancy Diagram - MAS LEDtube VLE 600mm HO 8W 865 T8

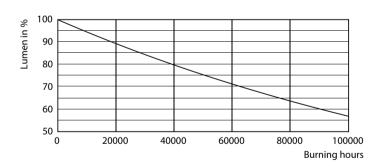


Life Expectancy Diagram - MAS LEDtube VLE 600mm HO 8W 865 T8

Lumen Maintenance Diagram - MAS LEDtube VLE 600mm HO 8W 865 T8

# **MASTER Value LEDtube T8**

## Lifetime

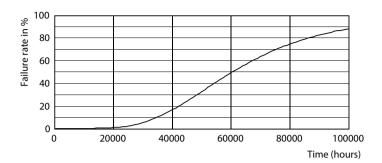

Life Expectancy Diagram - MAS LEDtube VLE 600mm HO 8W 865 T8



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.