

MASTER Value LEDtube T8



MAS LEDtube VLE 1200mm UO 15.5W 865 T8

A high-performance LED solution, the professional MASTER Value LED tube is ideal for replacing T8 fluorescent lamps using EM ballast or installing directly on the mains. This product provides an optimal combination of value and performance – for use in all general lighting, office, industry, retail, and hospitality applications. The unique design of this LED T8 tube light offers wide compatibility, safety and fast installation, as well as instant energy savings.

Product data

| General Information | |
|---------------------------------------|---------------------------------|
| Cap-Base | G13 [Medium Bi-Pin Fluorescent] |
| Nominal lifetime | 60,000 hour(s) |
| Switching Cycle | 200,000 |
| Lighting Technology | LED |
| Flux measurement reference | Sphere |
| CE mark | Yes |
| EU RoHS compliant | Yes |
| Light Technical | |
| Color Code | 865 [CCT of 6500K] |
| Beam Angle (Nom) | 190 degree(s) |
| Luminous Flux | 2,500 lumen |
| Color Designation | Cool Daylight |
| Correlated Color Temperature (Nom) | 6500 K |
| Luminous Efficacy (rated) (Nom) | 161 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |


| Flickering value (PstLM) | 1 |
|--|-----------------|
| Stroboscopic effect value (SVM) | 0.4 |
| Photobiological safety according to EN 62471 RGO | |
| Operating and Electrical | |
| Line Frequency | 50 to 60 Hz |
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 15.5 W |
| Starting Time (Nom) | 0.5 s |
| Warm-up time to 60% light | 0.5 s |
| Power Factor (Fraction) | 0.9 |
| Voltage (Nom) | 220-240 V |
| LED alternative to fluorescent lamp power | 36 W |
| Temperature | |
| Ambient temperature range | -20 °C to 45 °C |
| T-Case Maximum (Nom) | 60 °C |

MASTER Value LEDtube T8

| | |
|-------------------------------|---|
| Controls and Dimming | |
| Dimmable | No |
| Mechanical and Housing | |
| Bulb Finish | Frosted |
| Bulb Material | Glass |
| Product Length | 1,200 mm |
| Bulb Shape | Tube, double-ended |
| Approval and Application | |
| Energy Efficiency Class | C |
| Energy Saving Product | Yes |
| Approval Marks | RoHS compliance TUV CE marking KEMA Keur certificate |
| Energy Consumption kWh/1000 h | 16 kWh |
| EPREL Registration Number | 1095873 |


| | |
|---------------------------------|---|
| Product Data | |
| Full product code | 871951431684300 |
| Order product name | MAS LEDtube VLE 1200mm UO 15.5W 865 T8 |
| Order code | 929002997802 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 10 |
| Material Nr. (12NC) | 929002997802 |
| Full product name | MAS LEDtube VLE 1200mm UO 15.5W 865 T8 |
| EAN/UPC - Case | 8719514316850 |
| EAN/UPC - Product/Case | 8719514316843 |

Dimensional drawing

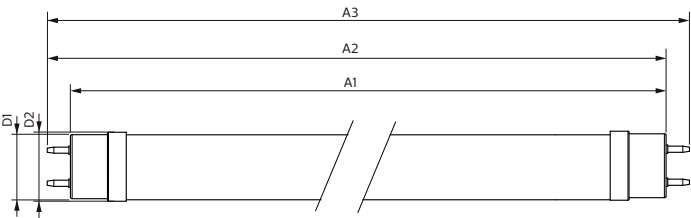


| Product | D1 | D2 | A1 | A2 | A3 |
|---|---------|-------|------------|------------|------------|
| MAS LEDtube VLE 1200mm UO 15.5W 865 T8 | 25.8 mm | 28 mm | 1,198.2 mm | 1,205.3 mm | 1,212.4 mm |

Photometric data

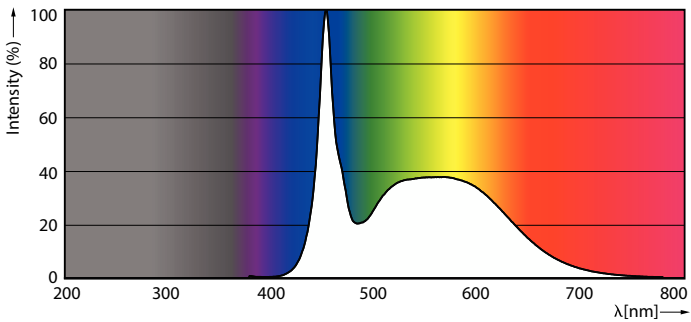


Spectral Power Distribution Colour - MAS LEDtube VLE 1200mm UO 15.5W 865 T8



General uniform lighting - MAS LEDtube VLE 1200mm UO 15.5W 865 T8


MASTER Value LEDtube T8

Photometric data




Light Distribution Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8


Lifetime

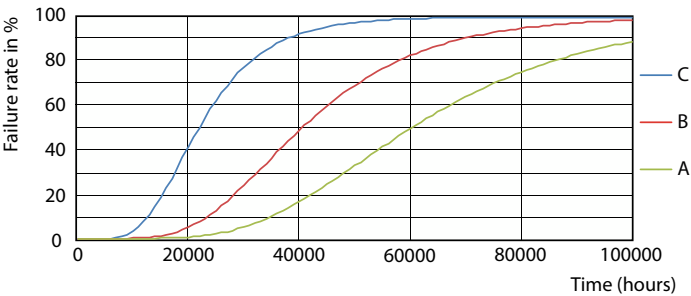


Life Expectancy Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

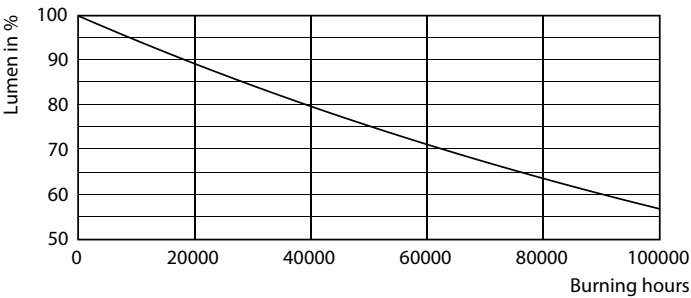

Lumen Maintenance Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

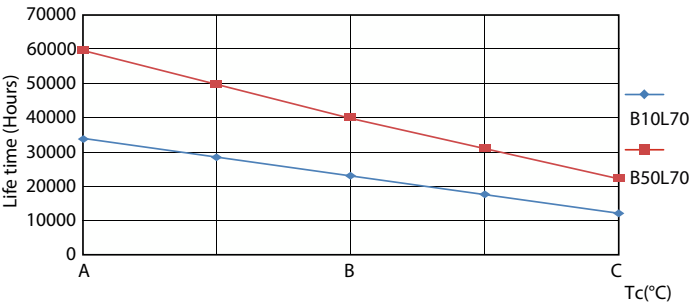


Life Expectancy Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

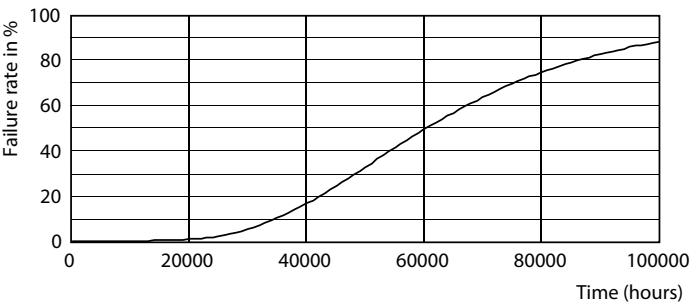

Life Expectancy Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

MASTER Value LEDtube T8

Lifetime

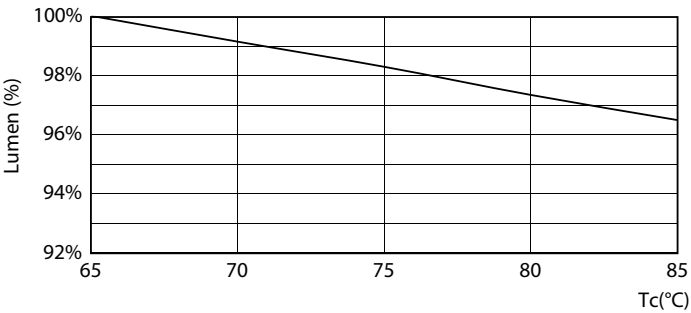

Lumen Maintenance Diagram - MAS LEDtube VLE 1200mm UO 15.5W 865 T8

