



# MASTER Value LEDtube T8



## MAS LEDtube VLE 1200mm UO 15.5W 830 T8

A high-performance LED solution, the professional MASTER Value LED tube is ideal for replacing T8 fluorescent lamps using EM ballast or installing directly on the mains. This product provides an optimal combination of value and performance – for use in all general lighting, office, industry, retail, and hospitality applications. The unique design of this LED T8 tube light offers wide compatibility, safety and fast installation, as well as instant energy savings.

#### **Product data**

General Information					
Cap-Base	G13 [Medium Bi-Pin Fluorescent]				
Nominal lifetime	60,000 hour(s)				
Switching Cycle	200,000				
Lighting Technology	LED				
Flux measurement reference	Sphere				
CE mark	Yes				
EU RoHS compliant	Yes				
Light Technical					
Color Code	830 [CCT of 3000K]				
Beam Angle (Nom)	190 degree(s)				
Luminous Flux	2,300 lumen				
Color Designation	White (WH)				
Correlated Color Temperature (Nom)	3000 K				
Luminous Efficacy (rated) (Nom)	148.00 lm/W				
Color Consistency	<6				
Color rendering index (CRI)	80				
LLMF At End Of Nominal Lifetime (Nom)	70 %				

Flickering value (PstLM)	1			
Stroboscopic effect value (SVM)	0.4			
Photobiological safety according to EN 62471 RGO				
Operating and Electrical				
Line Frequency	50 to 60 Hz			
Input Frequency	50 to 60 Hz			
Power Consumption	15.5 W			
Starting Time (Nom)	0.5 s			
Warm-up time to 60% light	0.5 s			
Power Factor (Fraction)	0.9			
Voltage (Nom)	220-240 V			
LED alternative to fluorescent lamp power	36 W			
Temperature				
Ambient temperature range	-20 °C to 45 °C			
T-Case Maximum (Nom)	60 °C			


Datasheet, 2023, October 10 data subject to change

## **MASTER Value LEDtube T8**

Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Bulb Finish	Frosted			
Bulb Material	Glass			
Product Length	1,200 mm			
Bulb Shape	Tube, double-ended			
Approval and Application				
Energy Efficiency Class	D			
Energy Saving Product	Yes			
Approval Marks	RoHS compliance TUV CE marking KEMA			
	Keur certificate			
Energy Consumption kWh/1000 h	16 kWh			
EPREL Registration Number	1095871			


Product Data	
Product Data	
Full product code	871951431680500
Order product name	MAS LEDtube VLE 1200mm UO 15.5W
	830 T8
Order code	929002997602
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002997602
Full product name	MAS LEDtube VLE 1200mm UO 15.5W
	830 T8
EAN/UPC - Case	8719514316812
EAN/UPC - Product/Case	8719514316805

## Dimensional drawing

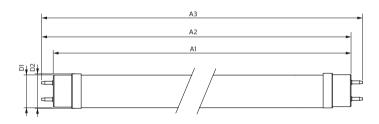


Product	D1	D2	A1	A2	А3
MAS LEDtube VLE 1200mm UO	25.8 mm	28 mm	1,198.2 mm	1,205.3 mm	1,212.4 mm
15.5W 830 T8					

## Photometric data








General uniform lighting - MAS LEDtube VLE 1200mm UO 15.5W 830 T8  $\,$ 


## **MASTER Value LEDtube T8**


#### Photometric data

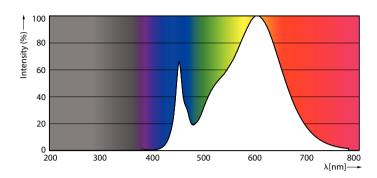


Spectral Power Distribution Colour - MAS LEDtube VLE 1200mm UO 15.5W 830 T8

#### Lifetime

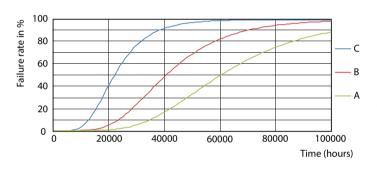


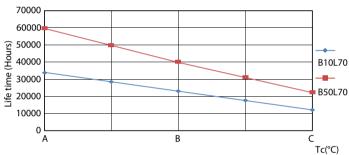

Life Expectancy Diagram - MAS LEDtube VLE 1200mm UO 15.5W 830 T8

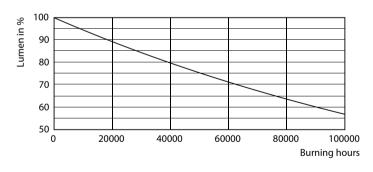

Life Expectancy Diagram - MAS LEDtube VLE 1200mm UO 15.5W 830 T8

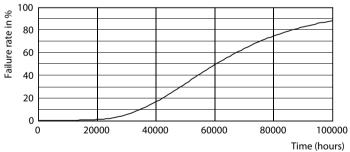


Lumen Maintenance Diagram - MAS LEDtube VLE 1200mm UO 15.5W 830 T8

Life Expectancy Diagram - MAS LEDtube VLE 1200mm UO 15.5W 830 T8

3

## **MASTER Value LEDtube T8**

#### Lifetime

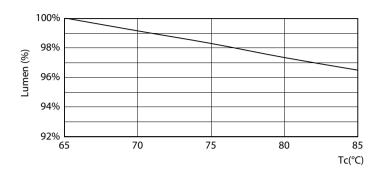

Lumen Maintenance Diagram - MAS LEDtube VLE 1200mm UO 15.5W 830 T8



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.