

CLEO Advantage 100W

F71 T12 100W PH

Item No: 986566340

Dimensions

Length (nom.)	1760,0 mm
Length without pins (max.)	1763,8 mm
Length base - pin (min.)	1768,5 mm
Length base - pin (max.)	1770,9 mm
Length with pins (max.)	1778,0 mm
Diameter (max.)	40,4 mm
Base	G13

Electrical Data

Supply voltage:	230 V +/-0,2%
Ballast (nominal):	100W / 230V
Lamp wattage (nominal):	92 W +/-5W
Lamp current (nominal)	920 mA
Lamp voltage (nominal)	115 V +/-10V

Physical Data

UVA Irradiance (315 - 400 nm) ¹	10,5 W/m ² +/-10%
UVB Irradiance (280 - 315 nm) ¹	340 mW/m ² +/-10%
UVB/UVA ratio	3,2%
E _{er} (250 - 400 nm) ¹	52 mW/m ² +/-15%
Recommended useful life	800 Hours


Lamp Specifications

(typical values acc. IEC / EN 61228)

- a) Dimensions
- See dimensions
- b) Reflector:
- c) Specified ballast: Cosmopower S 100W / 230V
- d) Electrical data:
 - Lamp power (typical) 92 W
 - Lamp current (typical) 920 mA
 - Lamp voltage (typical) 115 V
- e) Effective Irradiance¹
 - UV-erythem (250 - 400 nm) 54 mW/m²
 - NMSC (250 - 320 nm) 89 mW/m²
 - NMSC (321 - 400 nm) 9 mW/m²
- f) Aquivalency code 100-O-54/10,4

¹ acc. IEC measured in a distance of 25 cm to the lamp axis under stable operating conditions

Relative Spectral Distribution

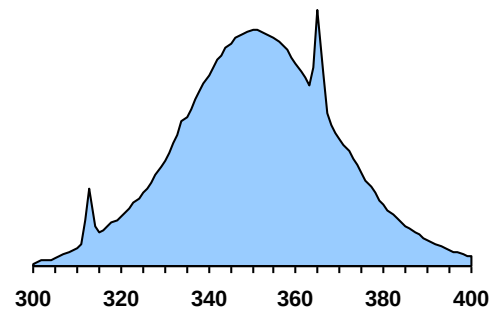

Recommended Exposure Time

UVA irradiance in W/m ²	First session tanning time in minutes	Maximum tanning time in minutes by skin type		
		2	3	4
90	3,7	9,3	13,0	16,7
140	2,4	6,0	8,3	10,7
190	1,8	4,4	6,2	7,9

Typical irradiance of a tanning unit²: 140 W/m²

Data regarding effective dose and recommended tanning times, are basing on norm DIN EN 60335-2-27.

² The tanning unit of reference contains 20 lamps in the bench and 24 lamps in the canopy. The bench is covered by double acrylics and the canopy by a single one. Please contact the equipment manufacturer, for individual irradiance of your solarium. These information are for orientation use only and have to be coordinated / adjusted individually.