



CorePro Glass LED bulbs



CorePro LEDBulbND4.5-40W E27 A60 827FR G

Featuring a classic heritage design, these filament LED lamps combine the familiar shapes of classic incandescent bulbs with the benefits of long-lasting LED technology. A very easy choice for people who are looking for a retrofit LED replacement, these CorePro LED bulbs provide 90% energy savings compared with conventional lamps. CorePro Glass LED bulbs provide excellent quality of light in a vintage style. CorePro LED lighting that offers a lifetime of 15,000 hours to reduce maintenance costs.

Product data

| General Information | |
|---------------------------------------|--------------------|
| Cap-Base | E27 [E27] |
| Nominal lifetime | 15,000 hour(s) |
| Switching Cycle | 30,000 |
| Lighting Technology | LED |
| Flux measurement reference | Sphere |
| CE mark | Yes |
| EU RoHS compliant | Yes |
| | |
| Light Technical | |
| Color Code | 827 [CCT of 2700K] |
| Luminous Flux | 470 lumen |
| Color Designation | Warm White (WW) |
| Correlated Color Temperature (Nom) | 2700 K |
| Luminous Efficacy (rated) (Nom) | 104.00 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| | |

| Flickering value (PstLM) | 1 | | |
|--|-------------|--|--|
| Stroboscopic effect value (SVM) | 0.4 | | |
| Photobiological safety according to EN 62471 RG1 | | | |
| | | | |
| Operating and Electrical | | | |
| Line Frequency | 50 to 60 Hz | | |
| Input Frequency | 50 to 60 Hz | | |
| Power Consumption | 4.5 W | | |
| Lamp Current (Nom) | 40 mA | | |
| Wattage Equivalent | 40 W | | |
| Starting Time (Nom) | 0.5 s | | |
| Warm-up time to 60% light | 0.5 s | | |
| Power Factor (Fraction) | 0.51 | | |
| Voltage (Nom) | 220-240 V | | |
| | | | |
| Temperature | | | |
| T-Case Maximum (Nom) | 50 ℃ | | |
| | | | |


Datasheet, 2023, October 9 data subject to change

CorePro Glass LED bulbs

| Controls and Dimming | | |
|-------------------------------|-----------------|--|
| Dimmable | No | |
| | | |
| Mechanical and Housing | | |
| Bulb Finish | Frosted | |
| Bulb Shape | A60 [A 60mm] | |
| | | |
| Approval and Application | | |
| Energy Efficiency Class | F | |
| Energy Consumption kWh/1000 h | 5 kWh | |
| EPREL Registration Number | 387365 | |
| EyeComfort | Yes | |
| | | |
| Product Data | | |
| Full product code | 871951436130000 | |

| Order product name | CorePro LEDBulbND4.5-40W E27 A60 | |
|---------------------------------|----------------------------------|--|
| | 827FR G | |
| Order code | 929001242992 | |
| Numerator - Quantity Per Pack | 1 | |
| Numerator - Packs per outer box | 10 | |
| Material Nr. (12NC) | 929001242992 | |
| Full product name | CorePro LEDBulbND4.5-40W E27 A60 | |
| | 827FR G | |
| EAN/UPC - Case | 8719514361317 | |
| EAN/UPC - Product/Case | 8719514361300 | |

Dimensional drawing



| Product | D | С |
|--|-------|--------|
| CorePro LEDBulbND4.5-40W E27 A60 827FR G | 60 mm | 110 mm |

Photometric data






Spectral Power Distribution Colour - CorePro LEDBulbND4.5-40W E27 A60 827FR G

Light Distribution Diagram - CorePro LEDBulbND4.5-40W E27 A60 827FR G


CorePro Glass LED bulbs

Photometric data



General uniform lighting - CorePro LEDBulbND4.5-40W E27 A60 827FR G

Lifetime

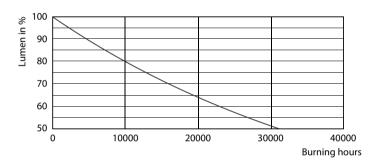

Life Expectancy Diagram - CorePro LEDBulbND4.5-40W E27 A60 827FR G

Lumen Maintenance Diagram - CorePro LEDBulbND4.5-40W E27 A60 827FR G



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.