

CoreLine Trunking Gen2

Unified glare rating CEN	28
--------------------------	----

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Voltage	220 to 240 V
Initial CLO power consumption	- W
Average CLO power consumption	- W
Inrush current	23.1 A
Inrush time	0.221 ms
Power Consumption	27.5 W
Power Factor (Fraction)	0.95
Connection	Push-in connector 5-pole
Cable	-
Number of products on MCB of 16 A type B	22

Temperature	
Ambient temperature range	-20 to +35 °C

Controls and Dimming	
Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface
Control interface	DALI
Constant light output	No

Mechanical and Housing	
Housing Material	Steel
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Housing Color	White RAL9016
Optical cover/lens finish	Opal
Overall length	1,700 mm
Overall width	80 mm
Overall height	50 mm

Dimensions (Height x Width x Depth)	50 x 80 x 1700 mm
-------------------------------------	-------------------


Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-
Protection class IEC	Safety class I

Initial Performance (IEC Compliant)	
Initial chromaticity	(0.38, 0.38) SDCM <3
Luminous flux tolerance	+/-10%
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life	5 %
50000 h	
Control gear failure rate at median useful life	0.1 %
100000 h	
Lumen maintenance at median useful life*	L85
50000 h	
Lumen maintenance at median useful life*	L75
100000 h	

Product Data	
Full product code	871951461799500
Order product name	LL217X 45S/840 1x PSD BV O
Order code	910925868239
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910925868239
Full product name	LL217X 45S/840 1x PSD BV O
EAN/UPC - Case	8719514617995

Dimensional drawing

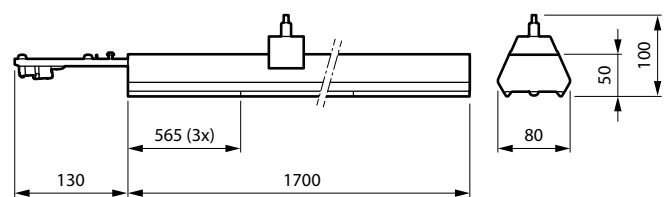

CoreLine Trunking Gen2

