



Maxos fusion

LL523X LED160S/830 PSD NB 7 WH

Maxos fusion Panel, 830 warm white, Power supply unit with DALI interface, Narrow beam, White

Maxos fusion is an adaptable LED trunking system that offers an excellent quality of light while more than halving energy costs compared to fluorescent lamps. For retail applications, a family of linear panels, non-linear modules and a spot portfolio can be smoothly integrated into the track backbone to let your merchandise sparkle and stand out. For industrial applications, the focus is on reducing installation and maintenance cost by using fewer linear panels. With the electrical set-up of up to 13 wires, the freedom to position these fixtures as required and the integration of other services/third-party hardware, the system allows you to reduce ceiling clutter. It can also be easily re-configured to accommodate future lay-out changes. The infrastructure is enabled to integrate sensors for data collection, giving you the opportunity to use insightful granular information to support your business.

Product data

| General Information | | Application Conditions | |
|--------------------------|---|------------------------------------|----------------|
| Light source replaceable | No | EU RoHS compliant | Yes |
| CE mark | Yes | Value ladder | Specification |
| Number of gear units | 1 unit | Maximum dim level | 1% |
| Driver included | Yes | Performance ambient temperature Tq | 25 °C |
| Flammability mark | For mounting on normally flammable surfaces | Suitable for random switching | Not applicable |
| Glow-wire test | Temperature 850 °C, duration 30 s | Light Technical | |
| Warranty period | 5 years | Luminous Flux | 16,000 lumen |
| Product family code | LL523X [Maxos fusion Panel] | Correlated Color Temperature (Nom) | 3000 K |
| Lighting Technology | LED | Luminous Efficacy (rated) (Nom) | 128 lm/W |
| ENEC mark | ENEC mark | | |

Maxos fusion

| | |
|---------------------------------|----------------|
| Color rendering index (CRI) | >80 |
| Flickering value (PstLM) | 1 |
| Stroboscopic effect value (SVM) | 0.4 |
| Beam angle of light source | 120 degree(s) |
| Light source color | 830 warm white |
| Optic type | Narrow beam |
| Luminaire light beam spread | 37° x 49° |
| Unified glare rating CEN | 22 |

Operating and Electrical

| | |
|--|------------------------|
| Line Frequency | 50 to 60 Hz |
| Input Voltage | 220-240 V |
| Inrush current | 5.1 A |
| Inrush time | 0.76 ms |
| Power Consumption | 125 W |
| Power Factor (Fraction) | 0.99 |
| Connection | Connection unit 7-pole |
| Cable | - |
| Number of products on MCB of 16 A type B | 12 |

Temperature

| | |
|---------------------------|---------------|
| Ambient temperature range | -20 to +35 °C |
|---------------------------|---------------|

Controls and Dimming

| | |
|-------------------------------|---------------------------------------|
| Dimmable | Yes |
| Driver/power unit/transformer | Power supply unit with DALI interface |
| Control interface | DALI |
| Constant light output | No |

Mechanical and Housing

| | |
|-----------------------------|---------------|
| Housing Material | Steel |
| Reflector material | - |
| Optic material | Polycarbonate |
| Optical cover/lens material | Polycarbonate |
| Fixation material | Steel |
| Housing Color | White |
| Optical cover/lens finish | Textured |

| | |
|-------------------------------------|-------------------|
| Overall length | 2,276 mm |
| Overall width | 62 mm |
| Overall height | 14 mm |
| Dimensions (Height x Width x Depth) | 14 x 62 x 2276 mm |

Approval and Application

| | |
|------------------------------|--------------------------|
| Ingress protection code | IP20 [Finger-protected] |
| Mech. impact protection code | IK02 [0.2 J standard] |
| Sustainability rating | Lighting for circularity |
| Protection class IEC | Safety class I |

Initial Performance (IEC Compliant)

| | |
|-----------------------------|----------------------|
| Initial chromaticity | (0.4314,0.4000) SDCM |
| Luminous flux tolerance | +/-7% |
| Power consumption tolerance | +/-11% |


Over Time Performance (IEC Compliant)

| | |
|---|--------|
| Driver failure rate at 5000 h | 0.50 % |
| Control gear failure rate at median useful life | 5 % |
| 50000 h | |
| Lumen maintenance at median useful life* | L80 |
| 50000 h | |
| Lumen maintenance at median useful life* | - |
| 100000 h | |

Product Data

| | |
|---------------------------------|--------------------------------|
| Full product code | 871869944808000 |
| Order product name | LL523X LED160S/830 PSD NB 7 WH |
| Order code | 910925865541 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 1 |
| Material Nr. (12NC) | 910925865541 |
| Full product name | LL523X LED160S/830 PSD NB 7 WH |
| EAN/UPC - Case | 8718699448080 |

Dimensional drawing

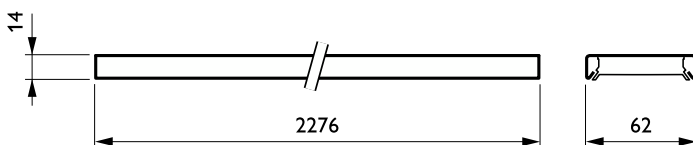

Maxos fusion

