



Maxos fusion

LL523X LED123S/840 PSD MB 7 WH HE

Maxos fusion Panel, 840 neutral white, Power supply unit with DALI interface, Medium beam, White

Maxos fusion is an adaptable LED trunking system that offers an excellent quality of light while more than halving energy costs compared to fluorescent lamps. For retail applications, a family of linear panels, non-linear modules and a spot portfolio can be smoothly integrated into the track backbone to let your merchandise sparkle and stand out. For industrial applications, the focus is on reducing installation and maintenance cost by using fewer linear panels. With the electrical set-up of up to 13 wires, the freedom to position these fixtures as required and the integration of other services/third-party hardware, the system allows you to reduce ceiling clutter. It can also be easily re-configured to accommodate future lay-out changes. The infrastructure is enabled to integrate sensors for data collection, giving you the opportunity to use insightful granular information to support your business.

Product data

| General Information | |
|--------------------------|---|
| Light source replaceable | No |
| CE mark | Yes |
| Number of gear units | 1 unit |
| Driver included | Yes |
| Flammability mark | For mounting on normally flammable surfaces |
| Glow-wire test | Temperature 850 °C, duration 30 s |
| Warranty period | 5 years |
| Product family code | LL523X [Maxos fusion Panel] |
| Lighting Technology | LED |
| ENEC mark | ENEC mark |

| | |
|-------------------|---------------|
| EU RoHS compliant | Yes |
| Value ladder | Specification |

| Application Conditions | |
|------------------------------------|----------------|
| Maximum dim level | 1% |
| Performance ambient temperature Tq | 25 °C |
| Suitable for random switching | Not applicable |

| Light Technical | |
|------------------------------------|--------------|
| Luminous Flux | 12,300 lumen |
| Correlated Color Temperature (Nom) | 4000 K |
| Luminous Efficacy (rated) (Nom) | 171 lm/W |

Maxos fusion

| | |
|---------------------------------|-------------------|
| Color rendering index (CRI) | >80 |
| Flickering value (PstLM) | 1 |
| Stroboscopic effect value (SVM) | 0.4 |
| Beam angle of light source | 120 degree(s) |
| Light source color | 840 neutral white |
| Optic type | Medium beam |
| Luminaire light beam spread | 66° x 80° |
| Unified glare rating CEN | 25 |

Operating and Electrical

| | |
|--|------------------------|
| Line Frequency | 50 to 60 Hz |
| Input Voltage | 220–240 V |
| Inrush current | 4.5 A |
| Inrush time | 1 ms |
| Power Consumption | 72 W |
| Power Factor (Fraction) | 0.98 |
| Connection | Connection unit 7-pole |
| Cable | - |
| Number of products on MCB of 16 A type B | 18 |

Temperature

| | |
|---------------------------|---------------|
| Ambient temperature range | -20 to +35 °C |
|---------------------------|---------------|

Controls and Dimming

| | |
|-------------------------------|---------------------------------------|
| Dimmable | Yes |
| Driver/power unit/transformer | Power supply unit with DALI interface |
| Control interface | DALI |
| Constant light output | No |

Mechanical and Housing

| | |
|-----------------------------|---------------|
| Housing Material | Steel |
| Reflector material | - |
| Optic material | Polycarbonate |
| Optical cover/lens material | Polycarbonate |
| Fixation material | Steel |
| Housing Color | White |
| Optical cover/lens finish | Textured |

| | |
|-------------------------------------|-------------------|
| Overall length | 2.276 mm |
| Overall width | 62 mm |
| Overall height | 14 mm |
| Dimensions (Height x Width x Depth) | 14 x 62 x 2276 mm |

Approval and Application

| | |
|------------------------------|--------------------------|
| Ingress protection code | IP20 [Finger-protected] |
| Mech. impact protection code | IK02 [0.2 J standard] |
| Sustainability rating | Lighting for circularity |
| Protection class IEC | Safety class I |

Initial Performance (IEC Compliant)

| | |
|-----------------------------|----------------------|
| Initial chromaticity | (0.34, 0.35) SDCM <3 |
| Luminous flux tolerance | +/-7% |
| Power consumption tolerance | +/-11% |


Over Time Performance (IEC Compliant)

| | |
|---|------|
| Control gear failure rate at median useful life | 5 % |
| 50000 h | |
| Control gear failure rate at median useful life | 10 % |
| 100000 h | |
| Lumen maintenance at median useful life* | L95 |
| 50000 h | |
| Lumen maintenance at median useful life* | L85 |
| 100000 h | |

Product Data

| | |
|---------------------------------|-----------------------------------|
| Full product code | 871951473760000 |
| Order product name | LL523X LED123S/840 PSD MB 7 WH HE |
| Order code | 910925868954 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 1 |
| Material Nr. (12NC) | 910925868954 |
| Full product name | LL523X LED123S/840 PSD MB 7 WH HE |
| EAN/UPC - Case | 8719514737600 |

Dimensional drawing

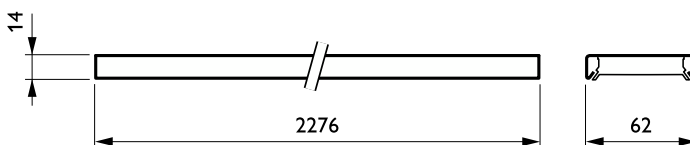

Maxos fusion

