



LuxSpace, recessed

DN571B LED20S/840 DIA-VLC-E C ELP3 WH

LuxSpace, recessed, 17.8 W, D200 mm, 2200 lumen, 4000 K, DALI, Interact Ready, UGR19, High-gloss reflector, IP20, ELP3h

Customers are looking to optimize all their resources, and that means not just their running costs (energy, etc.) but also user costs where they see much bigger impact on return. Therefore, LuxSpace is designed to provide the perfect combination of efficiency, visual comfort and design, without compromising on lighting performance (color rendering and light distribution). It offers a wide choice of options for creating the desired ambience to support user comfort, no matter the application is. For office applications LuxSpace supports health and wellbeing having dedicated Tunable White products and lighting controls.

Product data

General Information		EU RoHS compliant	
Light source replaceable	No	Yes	
Number of gear units	1 unit	Light Technical	
Driver included	Yes	Luminous Flux	2,200 lumen
Service tag	Yes	Correlated Color Temperature (Nom)	4000 K
Product family code	DN571B [LUXSPACE 2 COMPACT DEEP]	Luminous Efficacy (rated) (Nom)	124 lm/W
Connectivity	Interact Ready	Color rendering index (CRI)	>80
Lighting Technology	LED	Light source color	840 neutral white
Value ladder	Specification	Optic type	-
CE mark	Yes	Luminaire light beam spread	75°
Warranty period	5 years	Unified glare rating CEN	19
Flammability mark	For mounting on normally flammable surfaces	Operating and Electrical	
ENEC mark	ENEC mark	Line Frequency	50 to 60 Hz
Glow-wire test	Temperature 850 °C, duration 5 s	Input Voltage	220 to 240 V

LuxSpace, recessed

Inrush current	16 A
Inrush time	0.195 ms
Power Consumption	17.8 W
Power Factor (Fraction)	0.9
Connection	Push-in connector and pull relief
Cable	-
Number of products on MCB of 16 A type B	24

Temperature

Ambient temperature range	+10 to +25 °C
---------------------------	---------------

Controls and Dimming

Dimmable	Yes
Driver/power unit/transformer	Power supply unit with DALI interface and constant light output, external
Control interface	DALI
Constant light output	No

Mechanical and Housing

Housing Material	Aluminum die cast
Reflector material	Polycarbonate aluminum coated
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	Steel
Housing Color	White
Optical cover/lens finish	-
Reflector Finish	High-gloss reflector
Overall height	119 mm
Overall diameter	214 mm

Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-

Protection class IEC	Safety class II
----------------------	-----------------

Initial Performance (IEC Compliant)

Initial chromaticity	(0.38, 0.38) SDCM≤2
Luminous flux tolerance	+/-10%
Power consumption tolerance	+/-10%

Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life 50000 h	5 %
Lumen maintenance at median useful life* 50000 h	L90
Lumen maintenance at median useful life* 100000 h	L80


Application Conditions

Maximum dim level	1%
Performance ambient temperature Tq	25 °C
Suitable for random switching	Yes

Product Data

Full product code	871869996997400
Order product name	DN571B LED20S/840 DIA-VLC-E C ELP3 WH
Order code	910505100867
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	910505100867
Full product name	DN571B LED20S/840 DIA-VLC-E C ELP3 WH
EAN/UPC - Case	87186999699974
EAN/UPC - Product/Case	87186999699974

Dimensional drawing

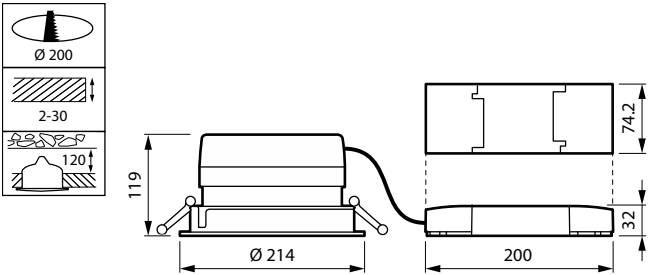

LuxSpace, recessed

