



# CoreLine panel

## RC132V G5 31\_36\_43S/840 PSU W60L60 NOC

CoreLine panel, All-in, 34.5 W, 24.5 W, 600x600 mm, 3100 lm, 3600 lm, 4300 lm, 4000 K

Philips CoreLine panel Gen5 delivers on the CoreLine promise of innovation, easy installation and excellent illumination. Designed as a direct replacement for functional luminaires in general lighting applications, this LED panel light's innovative MultiLumen feature offers a choice of three lumen packages in a single luminaire. This makes it easy to select the right product, gives you the flexibility respond to customer preferences on site, and means fewer product codes on stock. Installing this CoreLine RC132V LED panel is quick and easy too, thanks to a quick connector or Wieland connector. Interact Ready luminaires with integrated wireless communications are also available in this CoreLine range, ready to be used with Interact gateways, sensors and software.

### Product data



| General Information      |   | EU RoHS compliant                  |                      |
|--------------------------|---|------------------------------------|----------------------|
| Light source replaceable | No  | Yes                                |                      |
| Number of gear units     | 1 unit                                      | Light Technical                    |                      |
| Driver included          | Yes   | Luminous Flux                      | 3,100 3,600 4,300 lm |
| Lighting Technology      | LED   | Saturated Red (R9)                 | <50                  |
| Value ladder             | Performance                                 | Correlated Color Temperature (Nom) | 4000 K               |
| CE mark                  | Yes   | Luminous Efficacy (rated) (Nom)    | 125 lm/W             |
| Warranty period          | 5 years                                     | Color rendering index (CRI)        | ≥80                  |
| Flammability mark        | For mounting on normally flammable surfaces | Flickering value (PstLM)           | 1                    |
| ENEC mark                | ENEC mark                                   | Stroboscopic effect value (SVM)    | 0.4                  |
| Glow-wire test           | Temperature 650 °C, duration 30 s           | Light source color                 | 840 neutral white    |
|                          |   | Optic type                         | Beam angle 120°      |
|                          |   | Luminaire light beam spread        | 120°                 |

## CoreLine panel

|  |  |
|--|--|
| Unified glare rating CEN                 | 22   |
| <b>Operating and Electrical</b>          |  |
| Input Voltage                            | 220-240 V  |
| Line Frequency                           | 50 or 60 Hz  |
| Inrush current                           | 19.7 A   |
| Inrush time                              | 0.242 ms   |
| Power Consumption                        | 34.5 24.5 W  |
| Power Factor (Fraction)                  | 0.9  |
| Connection                               | Push-in connector 3-pole                                 |
| Cable                                    | -  |
| Number of products on MCB of 16 A type B | 13   |
| <b>Temperature</b>                       |  |
| Ambient temperature range                | -10 to +40 °C  |
| <b>Controls and Dimming</b>              |  |
| Dimmable                                 | No   |
| Driver/power unit/transformer            | Power supply unit (On/Off)                               |
| Control interface                        | -  |
| Constant light output                    | No   |
| <b>Mechanical and Housing</b>            |  |
| Housing Material                         | Steel  |
| Reflector material                       | Acrylate   |
| Optic material                           | Polystyrene  |
| Optical cover material                   | Acrylate   |
| Fixation material                        | -  |
| Housing Color                            | White  |
| Optical cover finish                     | Opal   |
| Overall length                           | 595 mm   |
| Overall width                            | 595 mm   |
| Overall height                           | 61 mm  |
| Dimensions (Height x Width x Depth)      | 61 x 595 x 595 mm  |
| <b>Approval and Application</b>          |  |
| Ingress protection code                  | IP20/44 [Finger-protected; wire-protected, splash-proof] |

|   |  |
|---|--|
| Mech. impact protection code                            | IK03 [0.3 J]                                   |
| Sustainability rating                                   | -  |
| Protection class IEC                                    | Safety class II                                |
| Photobiological risk                                    | Photobiological risk group 0 @200mm to EN62778 |
| Photobiological risk specification                      | 0.2 m  |
| <b>Initial Performance (IEC Compliant)</b>              |  |
| Luminous flux tolerance                                 | +/-10%   |
| Initial chromaticity                                    | (0.38, 0.38) SDCM≤3                            |
| Power consumption tolerance                             | +/-10%   |
| <b>Over Time Performance (IEC Compliant)</b>            |  |
| Control gear failure rate at median useful life 50000 h | 5 %  |
| Lumen maintenance at median useful life* 50000 h        | L90  |
| Lumen maintenance at median useful life* 100000 h       | L75  |
| <b>Application Conditions</b>                           |  |
| Performance ambient temperature Tq                      | 25 °C  |
| Suitable for random switching                           | Yes  |
| <b>Product Data</b>                                     |  |
| Order product name                                      | RC132V G5 31_36_43S/840 PSU W60L60 NOC         |
| Full product name                                       | RC132V G5 31_36_43S/840 PSU W60L60 NOC         |
| Full product code                                       | 871951495035100                                |
| Order code  | 911401844184                                   |
| Material Nr. (12NC)                                     | 911401844184                                   |
| Numerator - Quantity Per Pack                           | 1  |
| EAN/UPC - Product/Case                                  | 8719514950351                                  |
| Numerator - Packs per outer box                         | 1  |
| EAN/UPC - Case  | 8719514950351                                  |

## Dimensional drawing

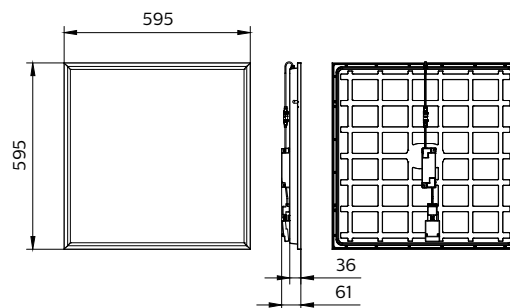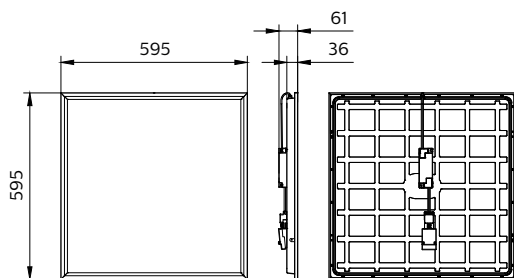

## CoreLine panel

