

# ToLEDo Lynx DE 1100LM G24Q 840 SL


Item No: 0030225



LED replacement for compact fluorescent Lynx-DE lamps 30,000 hours average rated life (L70 F50) 3 years warranty Quick, simple and safe replacement without rewiring Direct retrofit – easiest way to upgrade existing luminaires to LED technology Suitable for electronic ballast/ ECG ballast Compact and durable construction Minimum and maximum operating temperature: -20°C to 45°C Low energy consumption and no flickering Ideal for commercial and residential applications including offices, hotels, restaurants, warehouses, supermarkets, corridors, in addition to living rooms, kitchens and garages Warning: ToLEDo Lynx DE lamps are not suitable for magnetic ballast/CCG and direct mains 220-240V AC operation

## Technical Assets

### Dimensions (mm)

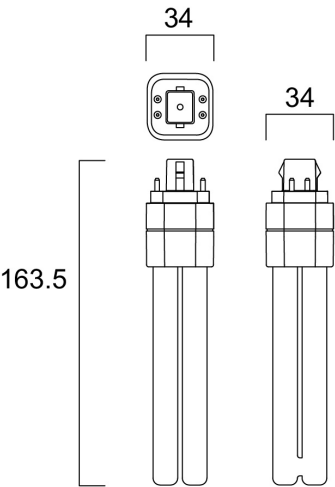

### Photometrics

# ToLEDo Lynx DE 1100LM G24Q 840 SL

Item No: 0030225



## General data

Product name	ToLEDo Lynx DE 1100LM G24Q 840 SL
Technology	LED
Lamp shape	U shape
Cap/Base	G24q-3
Lamp finish	Opal
General application	Hospitality, Logistics & Industry, Residential & Consumer
Operating temperature range (°C)	-20°C...+45°C
ETIM Class	EC001959
E-number FI	4941330
Warranty	3 years

## Optical data

Useful luminous flux (Φuse)	1100
Correlated colour temperature (k)	4000
Light colour	Cool White
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	280
Photobiological Risk Group	RG0

## Electrical data

Power consumption (W)	10
Wattage (W)	10
Equivalent watt (W)	26
Primary Supply/Product voltage - min (V)	40
Primary Supply/Product voltage - max (V)	40
Control gear required	Yes
Dimmable	No
Inrush Current (A)	10
Inrush Duration (µs)	800
Lamp Energy Label (class)	F

## Lifetime data

Lifespan L70 B50	30000
------------------	-------

## Physical data

IP rating	IP20
Nominal Product Length (mm)	170
Nominal Product Width (mm)	34
Nominal Product Height (mm)	34
Weight (kg)	0.072

## Packaging

Product EAN number	5410288302256
Packaging single length / height (cm)	4.6
Packaging single width (cm)	3.8
Packaging single depth (cm)	17.7
DUN14 (inner)	15410288302253
Units per outer package	6
Packaging outer length / height (cm)	15.0
Packaging outer width (cm)	8.6
Packaging outer depth (cm)	22.0

## Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	No
Suitable for household illumination	Yes
Safety message	Not suitable for household