

# ToLEDo Superia T8 Universal V3 2FT

## 1100LM 865

Item No: 0029274




50,000 hours average rated lifeLast 2.5 times longer than 600mm 18W fluorescent T8 Tri-phosphor lampHigh switching cycles – 200,000XHigh lumen efficacy - 147lm/WOmni-directional light distribution and wide beam angleMinimum and maximum operating temperature: -20°C to 50°CGlass construction and polycarbonate end-capsWorks only with compatible electronic ballastMust replace the fluorescent starter with LED dummy starter whenused with magnetic/ CCG ballastSuitable for direct mains operation (AC 220-240V) with single-end AC inputIdeal for factories, parking lots, supermarkets, department stores, schools and offices

## Technical Assets

### Dimensions (mm)

### Photometrics

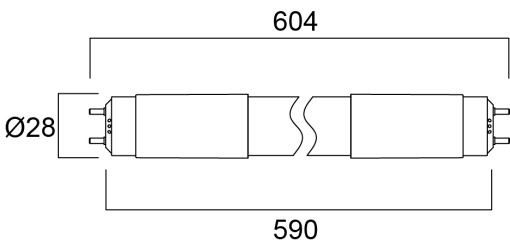

# ToLEDo Superia T8 Universal V3 2FT 1100LM 865

Item No: 0029274



## General data

Product name	ToLEDo Superia T8 Universal V3 2FT 1100LM 865
Technology	LED
Watt (Rated) (W)	7.5
Lamp shape	Tube, double-ended
Cap/Base	G13
Lamp finish	Opal
Fixture rating	Open
General application	Education, Hospitality, Logistics & Industry, Museums & Galleries, Office, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+45°C
Performance ambient temperature Tq (°C)	25
ETIM Class	EC001959
Warranty	5 years

## Optical data

Useful luminous flux (Φuse)	1100
Luminous flux (Rated) (lm)	1100
Correlated colour temperature (k)	6500
Light colour	Daylight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Beam Angle (°)	160
Photobiological Risk Group	RG0
Lumen maintenance at end of nominal life (%)	70

## Electrical data

Power consumption (W)	7.5
Wattage (W)	7.5
Current (A)	0.048
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Lamp power factor	0.8
Control gear required	No
No. Of switching cycles before premature failures	>100000
Dimmable	No
Inrush Current (A)	9.2
Inrush Duration (µs)	57
Lamp Energy Label (class)	D
Nominal Frequency (Hz)	50/60Hz
Max. products per 16A C Breaker	85
Max. products per 16A B Breaker	140

## Lifetime data

Lifespan L70 B50	50000
Average life (Nominal) (h)	50000
Average life (Rated) (h)	50000

## Physical data

Housing colour	White
IP rating	IP20
Nominal Product Length (mm)	603
Nominal Product Diameter (mm)	28
Weight (kg)	0.09

# ToLEDo Superia T8 Universal V3 2FT 1100LM 865

Item No: 0029274



## Packaging

Product EAN number	5410288292748
Packaging single length / height (cm)	60.0
Packaging single width (cm)	3.0
Packaging single depth (cm)	3.0
DUN14 (inner)	15410288292745
Units per outer package	10
Packaging outer length / height (cm)	60.7
Packaging outer width (cm)	21.0
Packaging outer depth (cm)	11.5

## Safety data

Optimal operating condition (°C)	-20-45
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	None