

ToLEDo Vintage G200 150LM BLK 820 SST


Item No: 0030112



Indulge in the allure of a vintage-inspired LED filament lamp, with black-tinted glass construction and sleek spiral design for timeless charm and eco-friendly illumination. Creates a warm and inviting ambiance and adds a touch of classic elegance to your home. Works effortlessly with SylSmart Home App, SylRemote, Amazon Alexa, Google Assistant and Siri Shortcuts for seamless control and convenience. Set the brightness level from 1% to 100% with wireless dimming feature for the ideal lighting experience.

Technical Assets

Dimensions (mm)

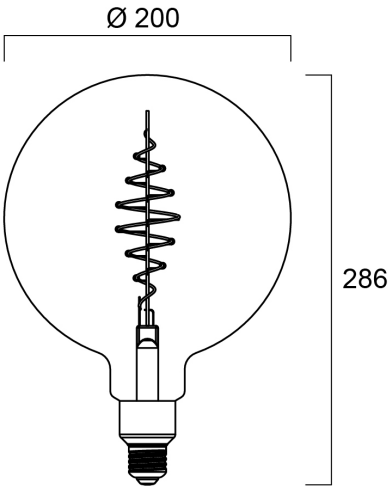

Photometrics

ToLEDo Vintage G200 150LM BLK 820 SST

Item No: 0030112



General data

Product name	ToLEDo Vintage G200 150LM BLK 820 SST
Technology	LED
Lamp shape	Round/globe
Cap/Base	E27
Lamp finish	Other
Fixture rating	Open
General application	Hospitality, Residential & Consumer, Retail
Operating temperature range (°C)	-20°C...+40°C
ETIM Class	EC001959
E-number FI	4741199
Warranty	3 years

Optical data

Useful luminous flux (Φuse)	150
Correlated colour temperature (k)	2000
Light colour	Candlelight
CRI (Ra)	80
Colour Variation Initial (SDCM)	SDCM6
Photobiological Risk Group	RG1

Electrical data

Power consumption (W)	7.5
Wattage (W)	7.5
Equivalent watt (W)	15
Current (A)	0.055
Primary Supply/Product voltage - min (V)	220
Primary Supply/Product voltage - max (V)	240
Control gear required	No
Dimmable	Yes
Inrush Current (A)	2.9
Inrush Duration (µs)	730
Lamp Energy Label (class)	G
Nominal Frequency (Hz)	50/60Hz

Lifetime data

Lifespan L70 B50	15000
------------------	-------

Physical data

IP rating	IP20
Nominal Product Length (mm)	186
Nominal Product Diameter (mm)	200
Weight (kg)	0.331

Packaging

Product EAN number	5410288301129
Packaging single length / height (cm)	22.3
Packaging single width (cm)	22.3
Packaging single depth (cm)	31.8
DUN14 (inner)	15410288301126
Units per outer package	2
Packaging outer length / height (cm)	46.7
Packaging outer width (cm)	23.8
Packaging outer depth (cm)	33.8

Safety data

Optimal operating condition (°C)	-20-40
Breakage cleaning instructions	Not applicable
Special purpose lamp	No
Dry applications use only	Yes
Suitable for household illumination	Yes
Safety message	Not Suitable for totally enclosed fixtures