


Metal Halide Lamp
DIS / UV-CUT




Metal Halide Lamp

DIS

	DIS-1H	DIS-2H	DIS-4H	DIS-6H Briese	DIS-12H	DIS-12H Briese	DIS-18H
Lamp Voltage [V]	80	70	70	95	100	100	150
Lamp Wattage [W]	125	200	400	575	1,200	1,200	1,800
Lighting Direction	ANY	ANY	ANY	ANY	ANY	ANY	ANY
Color Temperature [K]	6,000	6,000	6,000	6,000	6,000	6,000	6,000
Total Luminous Flux [lm]	8,400	15,000	32,000	49,000	110,000	110,000	160,000
Color Rendering [Ra]	>80	>90	>83	>90	>90	>90	>90
Rating Life [hr]	200	200	750	750	750	750	750
Outer Size [mm]	A (Diameter)	17	20	23	30	42	42
	(L1)	75	80	110	145	200	200
	C (L2)	39	39	60	70	107	107
Outline	Fig-1	Fig-1	Fig-1	-	Fig-3	-	Fig-3
Base	GZX9.5	GZY9.5	GZZ9.5	-	G38	-	G38
Note				Dedicated to Bricsc Light		Dedicated to Bricsc Light	

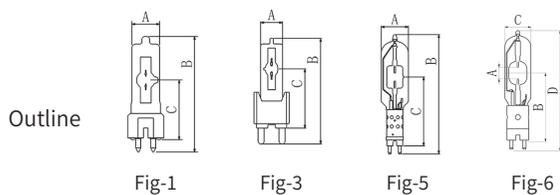

Base

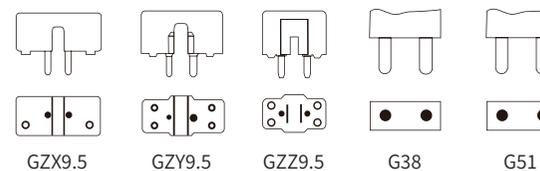

Metal Halide Lamp

DIS / UV-CUT

	DIS-25H Briese	DIS-40H Briese	DIS-90H VIVID	DIS-180H VIVID
Lamp Voltage [V]	115	200	165	225
Lamp Wattage [W]	2,500	4,000	9,000	18,000
Lighting Direction	ANY	ANY	BD ± 135	BD ± 135
Color Temperature [K]	6,000	6,000	6,000	6,000
Total Luminous Flux [lm]	220,000	380,000	825,000	1,650,000
Color Rendering [Ra]	>90	>90	>90	>90
Rating Life [hr]	500	500	400	250
Outer Size [mm]	A (Diameter)	60	75	85
	(L1)	240	255	360
	C (L2)	127	142	210
Outline	-	-	Fig-5	Fig-6
Base	-	-	G38	G51
Note	Dedicated to Bricsc Light	Dedicated to Bricsc Light		

Metal Halide Lamp

DIS-UV-Block

	DIS-2H UV-Block	DIS-2H UV-B/K56	DIS-4H UV-Block	DIS-4H UV-B/K56	DIS-6H UV-Block	DIS-6H SPOTLIGHT UV-Block	DIS-8H UV-Block	DIS-12H UV-Block	DIS-16H UV-Block	DIS-25H UV-Block	DIS-40H UV-Block VIVID	DIS-60H UV-Block VIVID	DIS-120H UV-Block
Lamp Voltage [V]	70	70	70	70	95	95	95	100	150	115	200	120	160
Lamp Wattage [W]	200	200	400	400	575	575	800	1,200	1,600	2,500	4,000	6,000	12,000
Lighting Direction	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY	ANY
Color Temperature [K]	6,000	6,000	6,000	6,600	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000	6,000
Total Luminous Flux [lm]	15,000	15,000	32,000	30,000	49,000	49,000	64,000	110,000	140,000	220,000	380,000	540,000	1,100,000
Color Rendering [Ra]	>90	>90	>85	>85	>90	>90	>75	>90	>90	>90	>90	>90	>90
Rating Life [hr]	200	200	750	750	750	1000	1000	750	750	500	1000	300	250
Outer Size [mm]	A (Diameter)	20	20	23	23	31	30	31	42	40	60	75	103
	(L1)	80	90	110	110	145	145	145	200	175	240	255	360
	C (L2)	39	52	60	60	70	70	70	107	85	127	142	210
Outline	Fig-1	Fig-1	Fig-1	Fig-1	Fig-2	Fig-2	Fig-2	Fig-3	Fig-2	Fig-4	Fig-4	Fig-5	Fig-5
Base	GZY9.5	GZY9.5	GZZ9.5	GZZ9.5	G22	G22	G22	G38	G22	G38	G38	G38	G38
Note		Dedicated to K5600 Joker		Dedicated to K5600 Joker						Horizontal lighting 1000hr. Downward lighting 500hr.			

