

T5 Short Standard / Luxline® Plus

F6W/T5/133

0000013



Range Features

-



PRODUCT OVERVIEW

Lamp finish	Coated
Lamp shape	Linear
Colour temperature (K)	4000
CRI (Ra)	64
EAN code	5410288000138
Energy class	A
Cap/Base	G5
Type	T5 Standard Short
Watt (Nominal) (W)	6
Light colour	640 Cool White
Ordering number	0000013
Efficacy (Rated) (lm/w)	43
Average life (Rated) (h)	6000
Luminous flux (Rated) (lm)	280
Technology	Fluorescent
Voltage (V)	42

DATA TABLE

General data

Average life (Nominal) (h)	10000
Control gear required	Yes
Lamp finish	Coated
Lamp shape	Linear
EAN code	5410288000138
Energy class	A
Fixture rating	Open
General application	Retail; Hospitality; Logistics and Industry; Museums; Education; Office; Residential & Consumer;
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195

T5 Short Standard / Luxline® Plus

F6W/T5/133

0000013

Intended purpose	General lighting
Cap/Base	G5
Lamp mercury content (mg)	2.3
Type	T5 Standard Short
Ordering number	0000013
Product name	F6W/T5/133
Average life (Rated) (h)	6000
Rated survival factor at 2000 h 50Hz	1
Rated survival factor at 4000 h 50Hz	0.99
Rated survival factor at 6000 h 50Hz	0.96
Rated survival factor at 8000 h 50Hz	0.83
Special purpose lamp	No
Technology	Fluorescent
Transformer required	No
Sales pack quantity	25
E-number SE	8356708
E-number FI	4942321

Optical data

Colour temperature (K)	4000
CRI (Ra)	64
Light colour	640 Cool White
Luminous flux (Nominal) (lm)	280
Rated lumen maint. factor at 2000 h 50Hz	0.88
Rated lumen maint. factor at 4000 h 50Hz	0.82
Rated lumen maint. factor at 6000 h 50Hz	0.78
Rated lumen maint. factor at 8000 h 50Hz	0.75
Luminous flux (Rated) (lm)	280

Electrical data

Current (A)	0.16
Ignition voltage (V)	0
kWh per 1000 hours burning time	7
Watt (Nominal) (W)	6
Efficacy (Rated) (lm/w)	43
Rated lamp efficacy (lm/W) 100H 50Hz at optimum temp.	48
Watt (Rated) (W)	6
Watt (Rated) - High frequency (W)	6
Voltage (V)	42

T5 Short Standard / Luxline® Plus


F6W/T5/133

0000013

Physical data

Diameter (mm)	16
Max. Lamp Diameter (mm) - D	16
Lamp Length (mm) - C/L	226.3
Length base to base (mm) - A	212.1
Length base to pin Min-Max - B	216.8-219.2
Single packaging type	Box/Sleeve
Weight (kg)	0.02
Outer package dimensions (L x W x H) (cm)	24.00 x 10.00 x 10.00
Single package dimensions (L x W x H) (cm)	22.70 x 1.90 x 1.90

TECHNICAL DRAWINGS

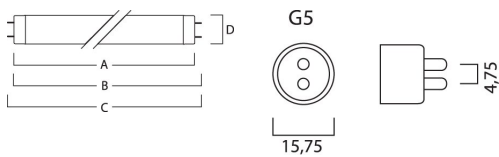

T5 Short Standard / Luxline® Plus

F6W/T5/133

0000013

