

## T5 FHE Luxline® Plus

FHE 21W/T5/835

0002788



### Range Features

- 



## PRODUCT OVERVIEW

Lamp finish	Coated
Lamp shape	Linear
Colour temperature (K)	3500
CRI (Ra)	85
EAN code	5410288027883
Energy class	A+
Cap/Base	G5
Type	T5 FHE Luxline Plus
Watt (Nominal) (W)	21
Light colour	835 White
Ordering number	0002788
Efficacy (Rated) (lm/w)	92
Luminous flux (Rated) (lm)	1900
Technology	Fluorescent
Voltage (V)	126

## DATA TABLE

### Optical data

Ambient temperature for maximum luminous flux (°C)	35
Colour temperature (K)	3500
CRI (Ra)	85
Light colour	835 White
Luminous flux (Nominal) (lm)	1900
Luminous flux (Nominal) at 35°C (lm)	2100
Rated lumen maint. factor at 12000 h 50Hz	0.91
Rated lumen maint. factor at 16000 h 50Hz	0.9

## T5 FHE Luxline® Plus

FHE 21W/T5/835

0002788

Rated lumen maint. factor at 20000 h 50Hz	0.88
Rated lumen maint. factor at 2000 h 50Hz	0.97
Rated lumen maint. factor at 4000 h 50Hz	0.95
Rated lumen maint. factor at 6000 h 50Hz	0.93
Rated lumen maint. factor at 8000 h 50Hz	0.92
Luminous flux (Rated) (lm)	1900

### General data

Average life (Nominal) (h)	24000
Control gear required	Yes
Lamp finish	Coated
Lamp shape	Linear
EAN code	5410288027883
Energy class	A+
Fixture rating	Open
General application	Retail; Hospitality; Logistics and Industry; Museums; Education; Office; Residential & Consumer;
IEC Reference	IEC 60081
IEC Reference 2	IEC 61195
Intended purpose	General lighting
Cap/Base	G5
Lamp mercury content (mg)	2.3
Type	T5 FHE Luxline Plus
Ordering number	0002788
Product name	FHE 21W/T5/835
Rated survival factor at 12000 h 50Hz	0.93
Rated survival factor at 16000 h 50Hz	0.9
Rated survival factor at 20000 h 50Hz	0.84
Rated survival factor at 2000 h 50Hz	0.99
Rated survival factor at 4000 h 50Hz	0.98
Rated survival factor at 6000 h 50Hz	0.96
Rated survival factor at 8000 h 50Hz	0.94
Special purpose lamp	No
Technology	Fluorescent
Transformer required	No
E-number FI	4944511

### Electrical data

Current (A)	0.17
-------------	------

## T5 FHE Luxline® Plus

FHE 21W/T5/835


**0002788**

Ignition voltage (V)	0
kWh per 1000 hours burning time	23
Watt (Nominal) (W)	21
Efficacy (Rated) (lm/w)	92
Rated lamp efficacy (lm/W) 100H 50Hz at optimum temp.	92
Watt (Rated) (W)	20.7
Watt (Rated) - High frequency (W)	20.7
Voltage (V)	126

### Physical data

Diameter (mm)	16
Max. Lamp Diameter (mm) - D	16
Lamp Length (mm) - C/L	863.2
Length base to base (mm) - A	849
Length base to pin Min-Max - B	853.7-856.1

### TECHNICAL DRAWINGS

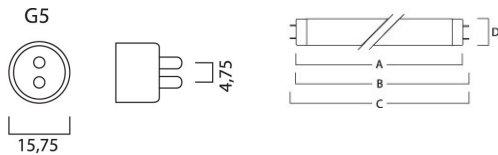

T5 FHE Luxline® Plus

FHE 21W/T5/835

0002788

