



Plusline Large (double ended)

Plusline Large 1000W R7s 230V 1CT/10

PlusLine Large flood delivers maximum light output to light up large areas like outdoor, buildings and shops.

Product data

• General Information

Cap-Base	R7S [R7s]
Operating Position	P4 [Parallel +/-4D or Horizontal(HOR)]
Nominal Lifetime (Nom)	2000 h
Switching Cycle	8000X

• Light Technical

Luminous Flux (Nom)	21500 lm
Luminous Flux (Rated) (Nom)	21500 lm
Correlated Color Temperature (Nom)	2900 K
Luminous Efficacy (rated) (Nom)	21.5 lm/W
Color Rendering Index (Nom)	100
Lmf At End Of Nominal Lifetime (Min)	80 %

• Operating and Electrical

Power (Rated) (Nom)	1000 W
Lamp Current (Nom)	4.35 A
Starting Time (Nom)	0.0 s
Warm Up Time To 60% Light (Nom)	instant full light
Power Factor (Nom)	1
Voltage (Nom)	230 V

• Controls and Dimming

Dimmable	Yes
----------	-----

• Mechanical and Housing

Bulb Finish	Clear (CL)
-------------	------------

• Approval and Application

Energy Efficiency Label (EEL)	C
Energy Consumption kWh/1000 h	1000 kWh

• Luminaire Design Requirements

Bulb Temperature (Max)	900 °C
Pinch Temperature (Max)	350 °C


• Product Data

Full product code	871150049434401
Order product name	Plusline Large 1000W R7s 230V 1CT/10
EAN/UPC - Product Order code	8711500494344 923932143203
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	923932143203
Net Weight (Piece)	0.016 kg
ILCOS Code	HDG/RS-1000-230-R7s-185,7


PHILIPS

Plusline Large (double ended)

Dimensional drawing

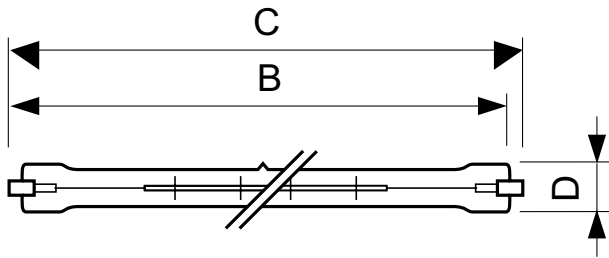

R7s, T11/T12



DEBig 1000W R7s 230V T11 CL

Product	D	B	B	B	C
Plusline Large 1000W R7s 230V 1CT/10	11 mm	187.3 mm	185.7 mm	184.1 mm	189.1 mm



© 2015 Philips Lighting Holding B.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

www.philips.com/lighting

2015, December 28
data subject to change