

# Q-MAX

**LED** Variable Downlight 3x33W  
4000K 230V 60°



3-flame Design

#### Technical data:

Power: 3x33W  
Color temperature: 4,000K  
Luminous flux: 3 x 4,559lm  
Color rendering index: >82  
Lifetime: >50,000 hrs.  
Luminous flux maint.: 90% at 50,000 hrs.  
Beam angle: 60°  
Control gear: electronic ballast  
Pivoting head: 30° / 35°  
Anti-reflective protective glass, powder coated

**Product no.:**  
24719



#### For all Downlights:

Voltage: 220-240V AC  
Heat sink: Aluminum  
Passive cooling system

#### Dimensions:




International Protection Code: **IP20**

International Safety Class:

## Brilliant **ADVANTAGES**

Whether in retail or office buildings. LED luminaires are increasingly replacing conventional lighting systems and offer numerous advantages:

- High-quality light without warm-up time
- Choice of different beam angles
- Fast tool-free replacement of trims and beam angles
- Wide color temperature spectrum available (2,700K - 4,000K)
- Housing available in different colors
- High energy efficiency
- High compatibility with most commercially available halogen transformers
- Long service life ensures effective, low-maintenance illumination
- Best light constancy with little or no loss of luminous flux
- Highest color rendering for natural colors
- Cardanic suspension for maximum flexibility in product illumination
- Optimized thermal properties for a long service life
- Quality from Germany

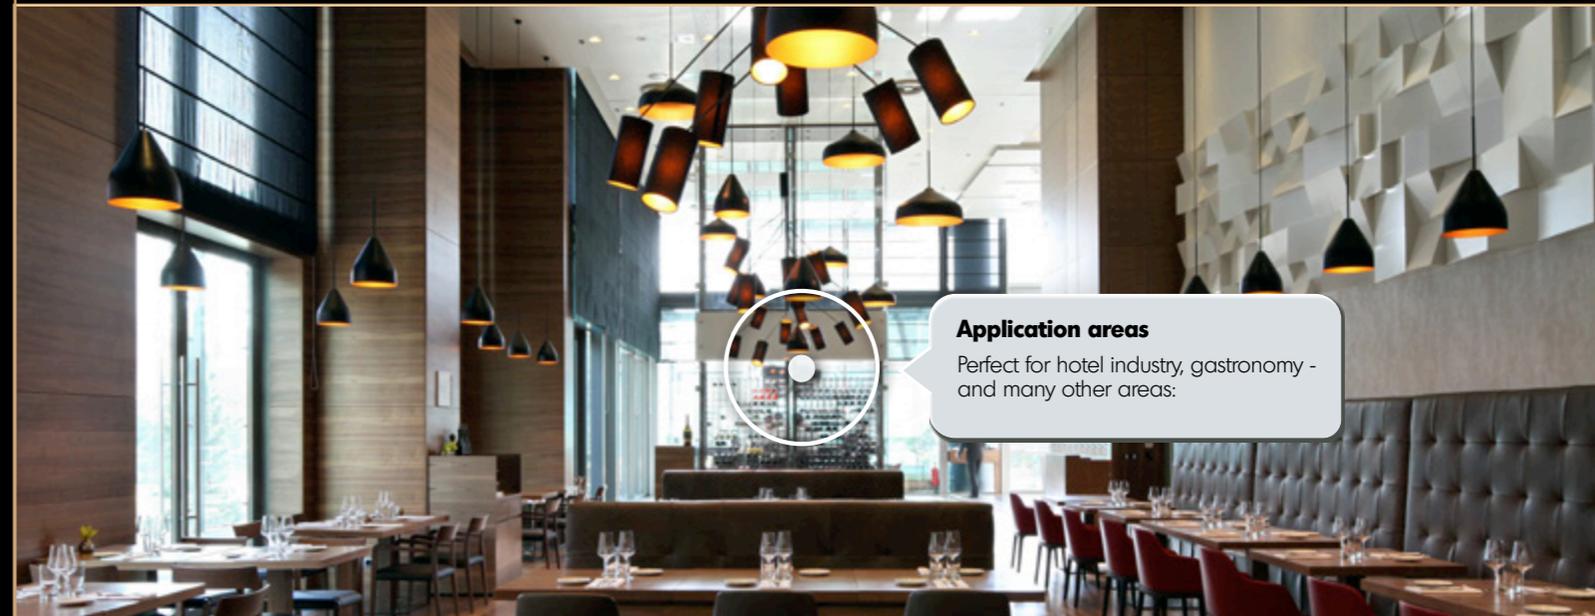

#### Application areas

Perfect for hotel industry, gastronomy - and many other areas: