



# New LED Bright Stik™



DATA SHEET

## Product information

LED Bright Stik™ illuminates spaces with light instantly. Its sleek cylindrical shape fits in place of a traditional incandescent bulb and some sockets where a traditional bulb or CFL doesn't fit. Replace a 40W, 60W, 75W & 100W incandescent with an LED Bright Stik and keep saving for the next 15 years\*. That's a long time you can spend not worrying about light bulbs.

## Features & benefits

- LED technology for energy saving
- Redesigned shape with multiple advantages:
- To fit in more fixtures compared to CFL
- Optimised for omni-directional light distribution
- Space-saving benefits on-shelf
- 240 degree Beam angle
- Replaces a standard 40W, 60W, 75W & 100W bulb
- Rated life of 15 years\*
- 3 colour options - 3000K, 4000K & 6500K
- Always ready - instant brightness
- No mercury - worry-free use and disposal
- Warranty: 2 years with maximum 8 000 burning hours according to GE Lighting Standard Warranty conditions

\*Based on 2.7 hours of per day use.

## Application areas




Retail



Hospitality



Home

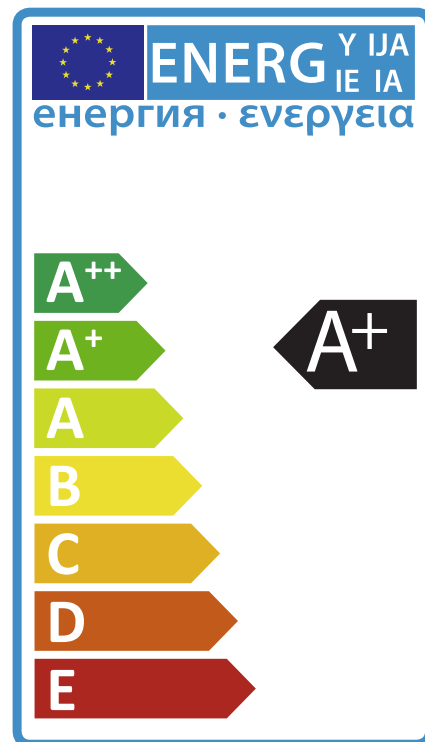

## IEC Standards

- EN 55015: Limits and methods of measurement of radio disturbance characteristics of electrical lighting
- EN 61547: Equipment for general lighting purposed EMC immunity requirements
- EN 61000-3-3: Limitation of voltage fluctuations and flicker in low voltage supply systems (equipment rated current ≤ 16A)
- EN 61000-3-2: Limits - Limits for harmonic current emissions (equipment input ≤ 16 A per phase)
- IEC 62471: Photo biological safety of lamps and lamp systems
- IEC 60061: Lamp Caps and holders together with gauges for the control of interchangeability and safety

## Specification summary

Product Code	Product Description	Nominal Power (W)	Repl. Watt (W)	Cap/Base	Nominal Lumens (Lm)	CCT (K)	Length (mm)	Diameter (mm)
<b>Single pack</b>								
93064017	LED 6/STIK/830/220-240V/B22/BX	6	40	B22	470	3000	113,5	38
93064014	LED 6/STIK/830/220-240V/E27/BX	6	40	E27	470	3000	115,5	38
93064015	LED 6/STIK/840/220-240V/E27/BX	6	42	E27	500	4000	115,5	38
93064018	LED 6/STIK/865/220-240V/B22/BX	6	42	B22	500	6500	113,5	38
93064016	LED 6/STIK/865/220-240V/E27/BX	6	42	E27	500	6500	115,5	38
93064022	LED 9/STIK/830/220-240V/B22/BX	9	60	B22	810	3000	113,5	38
93064019	LED 9/STIK/830/220-240V/E27/BX	9	60	E27	810	3000	115,5	38
93064020	LED 9/STIK/840/220-240V/E27/BX	9	63	E27	850	4000	115,5	38
93064023	LED 9/STIK/865/220-240V/B22/BX	9	63	B22	850	6500	113,5	38
93064021	LED 9/STIK/865/220-240V/E27/BX	9	63	E27	850	6500	115,5	38
93064027	LED12/STIK/830/220-240V/B22/BX	12	75	B22	1055	3000	135,5	45
93064024	LED12/STIK/830/220-240V/E27/BX	12	75	E27	1055	3000	137,5	45
93064025	LED12/STIK/840/220-240V/E27/BX	12	80	E27	1150	4000	137,5	45
93064028	LED12/STIK/865/220-240V/B22/BX	12	80	B22	1150	6500	135,5	45
93064026	LED12/STIK/865/220-240V/E27/BX	12	80	E27	1150	6500	137,5	45
93064032	LED15/STIK/830/220-240V/B22/BX	15	100	B22	1521	3000	135,5	45
93064029	LED15/STIK/830/220-240V/E27/BX	15	100	E27	1521	3000	137,5	45
93064030	LED15/STIK/840/220-240V/E27/BX	15	104	E27	1600	4000	137,5	45
93064033	LED15/STIK/865/220-240V/B22/BX	15	104	B22	1600	6500	135,5	45
93064031	LED15/STIK/865/220-240V/E27/BX	15	104	E27	1600	6500	137,5	45
<b>Triple pack</b>								
93079654	LED6/STIK/830/220-240V/E27/F 3/15	6	40	E27	470	3000	115,5	38
93079655	LED6/STIK/840/220-240V/E27/F 3/15	6	42	E27	500	4000	115,5	38
93080246	LED6/STIK/865/220-240V/E27/F 3/15	6	42	E27	500	6500	115,5	38
93068471	LED9/STIK/830/220-240/E27/F 3/15	9	60	E27	810	3000	115,5	38
93068472	LED9/STIK/840/220-240/E27/F 3/15	9	63	E27	850	4000	115,5	38
93068473	LED9/STIK/830/220-240/B22/F 3/15	9	60	B22	810	3000	113,5	38
93080247	LED9/STIK/865/220-240V/E27/F 3/15	9	63	E27	850	6500	115,5	38
<b>Double pack</b>								
93080248	LED12/STIK/830/220-240V/E27/F 2/10	12	75	E27	1055	3000	137,5	45
93080249	LED12/STIK/840/220-240V/E27/F 2/10	12	80	E27	1150	4000	137,5	45
93080250	LED12/STIK/865/220-240V/E27/F 2/10	12	80	E27	1150	6500	137,5	45
93080251	LED15/STIK/830/220-240V/E27/F 2/10	15	100	E27	1521	3000	137,5	45
93080252	LED15/STIK/840/220-240V/E27/F 2/10	15	104	E27	1600	4000	137,5	45
93080253	LED15/STIK/865/220-240V/E27/F 2/10	15	104	E27	1600	6500	137,5	45



Single pack



Double pack



Triple pack

## Operation and maintenance

- Store and use the lamps the same way as traditional lamps.
- Check your fixtures are properly wired and don't deliver voltage spike to lamps causing overheating/failure.
- Ambient temperature range -20° C to 40°C
- Lamps should be kept free from contamination.
- Good condition of the lamp-holder contacts is important to ensure proper operation of lamp.
- Ensure lamp is cool before removing.
- Switch off mains supply before installing/removing lamp.
- Non-dimmable

## Common attributes

- Voltage 220-240V 50/60Hz
- CRI>80
- Life Time 15000 Hours L70
- Beam angle 240°
- Switching cycles 50 000

## Dimensions (mm)

