

---

## HALOLINE PRO 400 W 230 V R7S

HALOLINE PRO | Double ended halogen lamps with tube base



---

### Areas of application

- General illumination
- Entrance lighting
- Pathway lighting
- Outdoor applications only in suitable luminaires
- Traffic areas
- Shops
- Restaurants, hotels and similar prestigious applications
- Offices, public buildings
- Ideal for emphasizing and accentuating the structure of a room

---

### Product benefits

- Brilliant accent lighting
- Direct replacement for standard tubular halogen lamps
- Significantly lower CO<sub>2</sub> emissions compared to standard version
- Lower thermal output (compared with the standard reference product)
- No transformer required
- Contains no mercury

---

### Product features

- Average life: 2,000 h
- Dimmable
- Color rendering index R<sub>a</sub>: 100

# Product datasheet

## Technical data

### Electrical data

Nominal wattage	400.00 W
Nominal voltage	230 V
Rated luminous flux	8750 lm
Rated wattage	400.00 W
Number of switching cycles	50000
Claimed equiv. conventional lamp power	500 W


### Photometrical data

Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	100
Nominal luminous flux	8750 lm

### Light technical data

Starting time	0.0 s
---------------	-------

### Dimensions & weight



Diameter	12.0 mm
Overall length	119.6 mm
Length	119.6 mm
Outer bulb	T12
Maximum diameter	12.0 mm

### Lifespan

Nominal lamp life time	2000 h
Rated lamp life time	2000 h

## Product datasheet

### Additional product data

Base (standard designation)	R7s
Lamp mercury content	0.0 mg
Mercury-free	Yes
Product remark	Fuse protection with indicated values recommended acc. to IEC60357, EN60357/For outdoor applications and operation in damp locations special approved fixtures are required

### Capabilities

Fuse, quick-acting	2.0 A
Burning position	Any
Dimmable	Yes

### Certificates & standards


Energy efficiency class	C
Energy consumption	400 kWh/1000h

### Country specific categorizations

ILCOS	HDG-400-230-R7s-114,2
-------	-----------------------

### Light Distribution

---

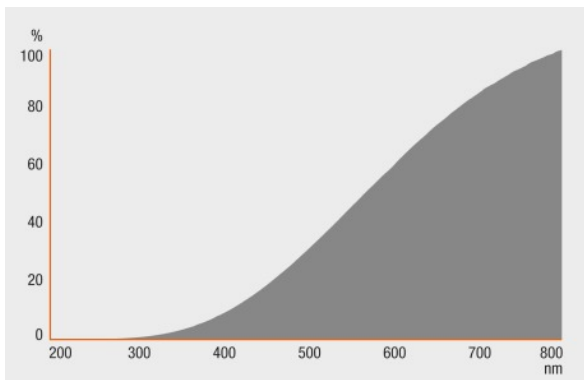

### Spectral power distribution

---

#### Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321207715	HALOLINE PRO 400 W 230 V R7S	Shipping carton box 20	149 mm x 78 mm x 113 mm	1.31 dm <sup>3</sup>	328.00 g

---

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

---

#### Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.