
DULUX D 26 W/865

OSRAM DULUX D | CFLni, 2 tubes, with 2-pin base for CCG operation



Areas of application

- Offices, public buildings
- Shops
- Supermarkets and department stores
- Hotels, restaurants
- Industry

Product benefits

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Long service life
- Improved maintenance

Product features

- Average life: 10,000 h
- Color rendering index R_a : 80...89
- Short and compact pin-base lamp with double-turn tubes
- Single-ended two-pin plug-in G24d base



Product datasheet

Technical data


Electrical data

Nominal wattage	26.00 W
Nominal voltage	105 V
Rated wattage	26.00 W
Rated luminous flux	1700 lm

Photometrical data

Nominal luminous flux	1700 lm
Light color (designation)	LUMILUX Cool Daylight
Luminous flux at 25 °C	1710 lm
Color temperature	6500 K
Color rendering index Ra	80...89
Rated LLMF at 2,000 h	0.77
Rated LLMF at 4,000 h	0.70
Rated LLMF at 6,000 h	0.69
Rated LLMF at 8,000 h	0.68

Dimensions & weight

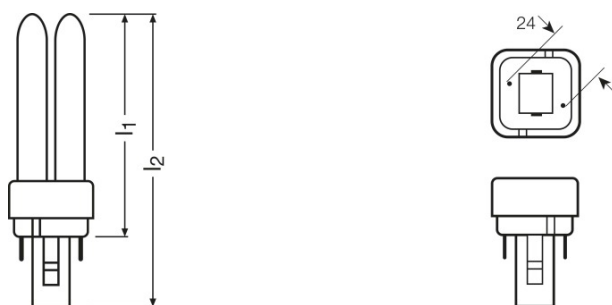

Diameter	13.0 mm
Overall length	170.0 mm
Length	172.0 mm
Length acc. to IEC standard	160 mm
Length with base excl. base pins/connection	149.00 mm
Outer bulb	T4
Maximum diameter	11.0 mm

Lifespan

Product datasheet

Nominal lamp life time	10000 h
Rated lamp life time	10000 h
Service life	6500 h
Rated lamp survival factor at 2,000 h	0.99
Rated lamp survival factor at 4,000 h	0.99
Rated lamp survival factor at 6,000 h	0.95
Rated lamp survival factor at 8,000 h	0.81
Operation mode LLMF/LSF	50 Hz
Lifespan	10000 h ¹⁾

¹⁾ With CCG/LLCG

Additional product data

Base (standard designation)	G24d-3
Lamp mercury content	1.3 mg

Capabilities

Dimmable	No
Suitable for indoor	Yes

Certificates & standards


Energy efficiency class	B
Energy consumption	32 kWh/1000h

Country specific categorizations

ILCOS	FSQ-26/865-I-G24d-3
-------	---------------------

Product datasheet

Light Distribution

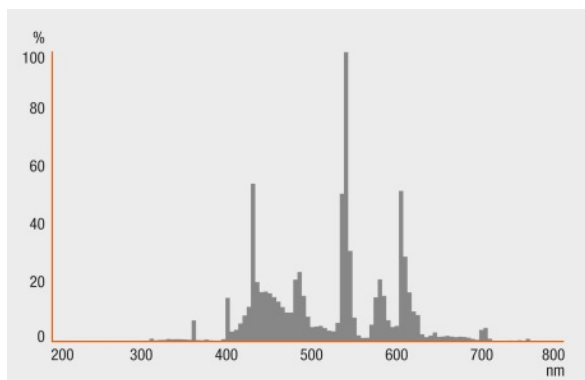

Spectral power distribution

Equipment / Accessories

- Suitable for operation on conventional control gear

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300194196	DULUX D 26 W/865	Shipping carton box 200	405 mm x 390 mm x 432 mm	68.23 dm ³	14053.00 g
4050300486987	DULUX D 26 W/865	Shipping carton box 10	192 mm x 119 mm x 155 mm	3.54 dm ³	694.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Product datasheet

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.