



# MASTER TL-D Super 80



## MASTER TL-D Super 80 15W/840 SLV/25

The MASTER TL-D Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General information		Luminous Flux (Rated) (Nom)	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]		1000 lm
Life To 10% Failures (Nom)	12000 h	Color Designation	Cool White (CW)
Life to 50% Failures (Nom)	15000 h	Chromaticity Coordinate X (Nom)	0.38
Life to 50% Failures Preheat (Nom)	20000 h	Chromaticity Coordinate Y (Nom)	0.38
LSF 2000 h Rated	99 %	Correlated Color Temperature (Nom)	4000 K
LSF 4000 h Rated	99 %	Luminous Efficacy (rated) (Nom)	67 lm/W
LSF 6000 h Rated	99 %	Color Rendering Index (Nom)	82
LSF 8000 h Rated	99 %	LLMF 2000 h Rated	96 %
LSF 12000 h Rated	89 %	LLMF 4000 h Rated	95 %
LSF 16000 h Rated	33 %	LLMF 6000 h Rated	94 %
LSF 20000 h Rated	2 %	LLMF 8000 h Rated	93 %
Flux measurement reference	Sphere	LLMF 12000 h Rated	92 %
		LLMF 16000 h Rated	91 %
		LLMF 20000 h Rated	90 %
Light technical		Operating and electrical	
Color Code	840 [ CCT of 4000K]	Power (Nom)	15.5 W
Luminous Flux (Nom)	1000 lm		

# MASTER TL-D Super 80

Lamp Current (Nom)	0.335 A
<b>Temperature</b>	
Design Temperature (Nom)	25 °C
<b>Controls and dimming</b>	
Dimmable	Yes
<b>Mechanical and housing</b>	
Bulb Shape	T8 [ 26 mm (T8)]
<b>Approval and application</b>	
Energy Efficiency Class	G
Mercury (Hg) Content (Max)	2 mg
Mercury (Hg) Content (Nom)	2.0 mg

Energy Consumption kWh/1000 h	16 kWh
EPREL Registration Number	423408
<b>Product data</b>	
Full product code	871150070280740
Order product name	MASTER TL-D Super 80 15W/840 SLV/25
EAN/UPC - Product	8711500702807
Order code	927922284014
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	927922284014
Net Weight (Piece)	56.570 g
ILCOS Code	FD-15/40/1B-E-G13


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Super 80 15W/840 SLV/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

## MASTER TL-D Super 80 15W/840 SLV/25

## Photometric data

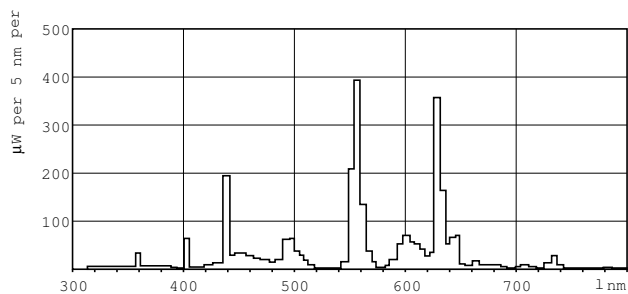

LDPB\_TL-D8\_840\_0001-Spectral power distribution B/W

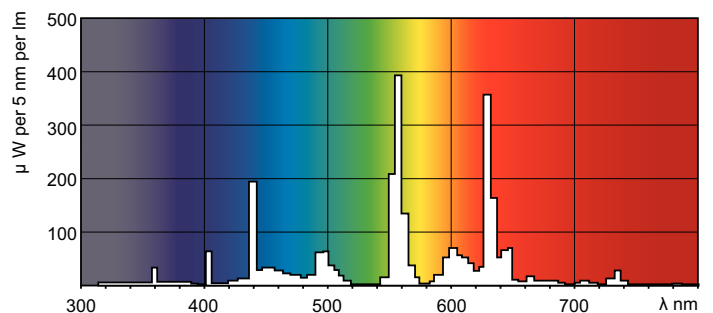

LDPO\_TL-D8\_840\_0001-Spectral power distribution Colour

# MASTER TL-D Super 80

## Lifetime



LDLE\_TL-D8\_0001-Life expectancy diagram

LDLE\_TL-D8\_0002-Life expectancy diagram



LDLM\_TL-D8\_0001-Lumen maintenance diagram

