

# MASTER LEDtube EM/Mains T8

#### MAS LEDtube 900mm HO 12W865 T8

The Philips MASTER LEDtube integrates a LED light source into a traditional fluorescent form factor. Its unique design creates a perfectly uniform visual appearance which cannot be distinguished from traditional fluorescent. For those that are looking for value for money within limited budget and re-lamping efforts for better light effect and lifetime.

#### **Product data**

General Information						
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]					
Nominal Lifetime (Nom)	50000 h					
Switching Cycle	200000X					
B50L70	50000 h					
Light Technical						
Color Code	865 [ CCT of 6500K]					
Luminous Flux (Nom)	1575 lm					
Luminous Flux (Rated) (Nom)	1575 lm					
Correlated Color Temperature (Nom)	6500 K					
Color Consistency	<6					
Color Rendering Index (Nom)	83					
LLMF At End Of Nominal Lifetime (Nom)	70 %					
Operating and Electrical						
Input Frequency	50 to 60 Hz					
Power (Rated) (Nom)	12 W					
Lamp Current (Max)	57 mA					

Lamp Current (Min)	51 mA
Starting Time (Nom)	0.5 s
Warm Up Time To 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	220-240 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	50 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Product Length	900 mm

Datasheet, 2017, March 3 data subject to change

1 .... 6 .... 1 0 # . \

# MASTER LEDtube EM/Mains T8

Approval and Application	
Energy Saving Product	Yes
Energy Efficiency Label (EEL)	A++
Approval Marks	CE marking RoHS compliance KEMA Keur certificate
Energy Consumption kWh/1000 h	12 kWh
Product Data	
Full product code	871869668710900

MAS LEDtube 900mm HO 12W865 T8


EAN/UPC - Product	8718696687109			
Order code	929001298502			
Numerator - Quantity Per Pack	1			
Numerator - Packs per outer box	10			
Material Nr. (12NC)	929001298502			
Net Weight (Piece)	0.174 kg			

### Warnings and Safety

Order product name

• NOTES: The overall energy efficiency and light distribution of any installation that uses these lamps are determined by the design of the installation.


### **Dimensional drawing**

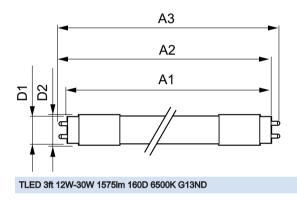

Product	D1	D2	A1	A2	A3
MAS LEDtube 900mm HO 12W865 T8	25.78 mm	28 mm	893.3 mm	900.4 mm	907.5 mm

#### Photometric data



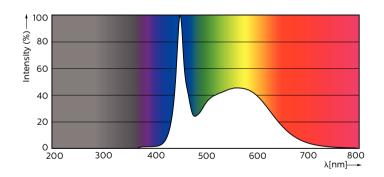

# MASTER LEDtube EM/Mains T8

