




GE  
Lighting

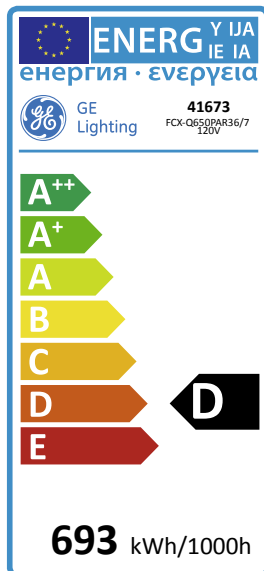

693  
kWh/1000h

D  
energy class

## PAR 36 FCX-Q650PAR36/7 120V 41673

### Product information

PAR lamps provide a robust and flexible design solution for a wide range of applications. Choice of PAR36, PAR46, PAR56 or PAR64

- 3000 K or 4200 K colour temperature
- Choice of beam widths
- Excellent colour rendering
- High efficiency combined with low operating costs
- Robust and reliable
- UV control
- Easy retrofit
- Colour consistent throughout life
- Colour blends with halogen and fluorescent

### Application areas



Club and Disco



## Product data

Product Code	41673
Bulb Shape	PAR
Bulb Diameter [mm]	114.3
Maximum Overall Length [mm]	70
Net weight per piece [g]	258
Gross weight per piece [g]	260
Brand	General Electric (GE)
Cap/Base	Ferrule

## Performance data

Nominal beam angle [°]	21
Nominal center beam candlepower (CBCP) [cd]	24000
Weighted energy consumption [kWh/1000h]	692.4
Energy efficiency class (EEC)	D
Rated Life [h]	75
Nominal correlated colour temperature (CCT) [K]	3350
Colour Rendering Index (CRI) [Ra]	100

## Electrical data

Coil type	CC-8
Ballast Required	Yes
Nominal power [W]	360
Nominal lamp voltage [V]	82

## Logistic data

DUN Code	00043168416733
Pack Quantity	12
Layer quantity	144 EUR, 192 UK
Layer quantity EUR	144
Layer quantity UK	192
Pallet quantity EUR (PC)	432
Pallet quantity UK (PC)	576
Outer case size	313 x 211 x 226 (mm)
Product status	Available

## Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

## Disclaimer

Special purpose lamp – Stage Studio. Not suitable for household illumination.