



MSR Gold™ FastFit

MSR Gold™ 1500/2 FastFit

Product data

General Information	
Cap-Base	PGJX50 [PGJX50]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Entertainment
Life to 50% Failures (Nom)	750 h
System Description	FastFit
Light Technical	
Luminous Flux (Min)	104000 lm
Luminous Flux (Nom)	116000 lm
Chromaticity Coordinate X (Nom)	302
Chromaticity Coordinate Y (Nom)	320
Correlated Color Temperature (Nom)	7200 K
Luminous Efficacy (rated) (Nom)	77 lm/W
Color Rendering Index (Nom)	77
Operating and Electrical	
Power (Rated) (Nom)	1500 W
Lamp Current (Nom)	16.1 A
Ignition Supply Voltage (Min)	198 V


Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	PGJX50
Luminaire Design Requirements	
Bulb Temperature (Max)	950 °C
Pinch Temperature (Max)	500 °C
Product Data	
Full product code	871869962595500
Order product name	MSR Gold™ 1500/2 FastFit
EAN/UPC - Product	8718699625955
Order code	928410305115
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material Nr. (12NC)	928410305115
Net Weight (Piece)	0.133 kg

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

MSR Gold™ FastFit


Dimensional drawing

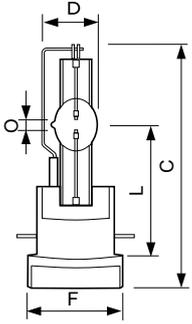


Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR Gold 1500/2	28 mm	6.3 mm	64 mm	66 mm	65 mm	128 mm	50 mm
FastFit							

MSR Gold 1500/2 FastFit

Photometric data

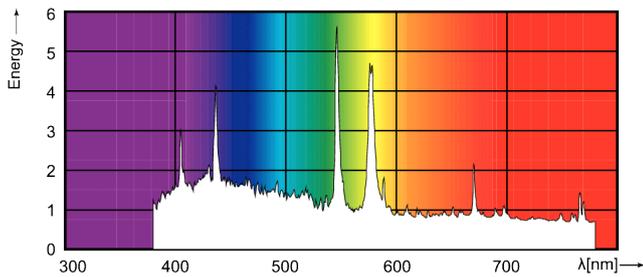

Spectrum MSR Gold™ 1500 FastFit

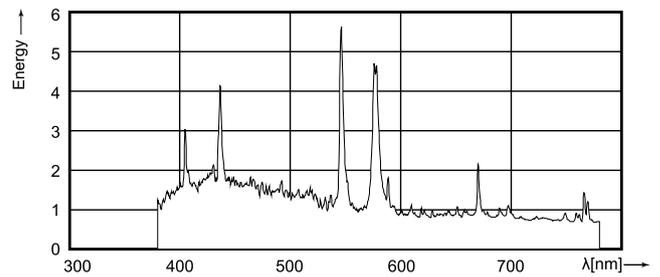

Spectrum MSR Gold™ 1500 FastFit

