



# PRODUCT FAMILY DATASHEET

## LEDVANCE PANEL LED 625

### LED panel luminaires



---

#### AREAS OF APPLICATION

- Direct replacement for luminaires with fluorescent lamps
- Corridors
- Offices
- Conference rooms
- Reception areas
- Foyers
- Elevators
- Suitable for recessed ceiling systems with grid size of 625 x 625 mm

---

#### PRODUCT BENEFITS

- High luminous efficacy
- Energy savings of up to 50 % compared to conventional luminaires
- Easy and quick installation
- Very homogenous light
- 5 years guarantee
- External driver for extended flexibility (compatible with selected DALI drivers)
- Very slim aluminum housing (only 10.5 mm) and matt white frame

---

#### PRODUCT FEATURES

- Type of protection: IP20
- Aluminum housing, polystyrene diffuser
- Ambient temperature in operation: -10...+45 °C







TECHNICAL DATA

Product description	Electrical data					Photometrical data				Light technical data	
	Operating mode	Nominal wattage	Nominal voltage	Power factor $\lambda$	Mains frequency	Color temperature	Luminous flux	Light color (designation)	Color rendering index Ra	Beam angle	UGR longitudinal
PANEL LED 625 30 W 3000 K	Electronic control gear (ECG)	30.00 W	220...240 V	>0.90	50/60 Hz	3000 K	3000 lm	Warm White	>80	120 °	
PANEL LED 625 30 W 4000 K	Electronic control gear (ECG)	30.00 W	220...240 V	>0.90	50/60 Hz	4000 K	3000 lm	Cool White	>80	120 °	
PANEL LED 625 33 W 3000 K UGR < 19	Electronic control gear (ECG)	33.00 W	220...240 V	>0.90	50/60 Hz	3000 K	3100 lm	Warm White	>80	90.00 °	<19
PANEL LED 625 33 W 4000 K UGR < 19	Electronic control gear (ECG)	33.00 W	220...240 V	>0.90	50/60 Hz	4000 K	3600 lm	Cool White	>80	90.00 °	<19
PANEL LED 625 40 W 3000 K	Electronic control gear (ECG)	40.00 W	220...240 V	>0.90	50/60 Hz	3000 K	4000 lm	Warm White	>80	120 °	
PANEL LED 625 40 W 4000 K	Electronic control gear (ECG)	40.00 W	220...240 V	>0.90	50/60 Hz	4000 K	4000 lm	Cool White	>80	120 °	

Product description	UGR lateral	Dimensions & weight			Colors & materials			Temperatures & operating conditions
		Length	Width	Height	Body material	Product color	Cover material	Ambient temperature range
PANEL LED 625 30 W 3000 K		620.0 mm	620.0 mm	10.5 mm	Aluminum	White	Polystyrene (PS)	-10...45 °C
PANEL LED 625 30 W 4000 K		620.0 mm	620.0 mm	10.5 mm	Aluminum	White	Polystyrene (PS)	-10...45 °C
PANEL LED 625 33 W 3000 K UGR < 19	<19	620.0 mm	620.0 mm	10.5 mm	Aluminum	White	Polystyrene (PS)	-10...45 °C
PANEL LED 625 33 W 4000 K UGR < 19	<19	620.0 mm	620.0 mm	10.5 mm	Aluminum	White	Polystyrene (PS)	-10...45 °C
PANEL LED 625 40 W 3000 K		620.0 mm	620.0 mm	10.5 mm	Aluminum	White	Polystyrene (PS)	-10...45 °C
PANEL LED 625 40 W 4000 K		620.0 mm	620.0 mm	10.5 mm	Aluminum	White	Polystyrene (PS)	-10...45 °C

Product description	Lifespan				Capabilities		Certificates & standards
	Lifespan L70 at 25 °C	Lifespan L80 at 25 °C	Lifespan L90 at 25 °C	Number of switching cycles	Dimmable	Type of connection	Protection class
PANEL LED 625 30 W 3000 K	50000 h	40000 h	20000 h	25000	No	Terminal, 2-pin	II
PANEL LED 625 30 W 4000 K	50000 h	40000 h	20000 h	25000	No	Terminal, 2-pin	II
PANEL LED 625 33 W 3000 K UGR < 19	50000 h	40000 h	20000 h	25000	No	Terminal, 2-pin	II
PANEL LED 625 33 W 4000 K UGR < 19	50000 h	40000 h	20000 h	25000	No	Terminal, 2-pin	II
PANEL LED 625 40 W 3000 K	50000 h	40000 h	20000 h	25000	No	Terminal, 2-pin	II
PANEL LED 625 40 W 4000 K	50000 h	40000 h	20000 h	25000	No	Terminal, 2-pin	II

Product description	Type of protection	Standards
PANEL LED 625 30 W 3000 K	IP20	CE/CB/TÜV SÜD/EAC/RoHS
PANEL LED 625 30 W 4000 K	IP20	CE/CB/TÜV SÜD/EAC/RoHS
PANEL LED 625 33 W 3000 K UGR < 19	IP20	CE/CB/TÜV SÜD/EAC/RoHS
PANEL LED 625 33 W 4000 K UGR < 19	IP20	CE/CB/TÜV SÜD/EAC/RoHS
PANEL LED 625 40 W 3000 K	IP20	CE/CB/TÜV SÜD/EAC/RoHS
PANEL LED 625 40 W 4000 K	IP20	CE/CB/TÜV SÜD/EAC/RoHS

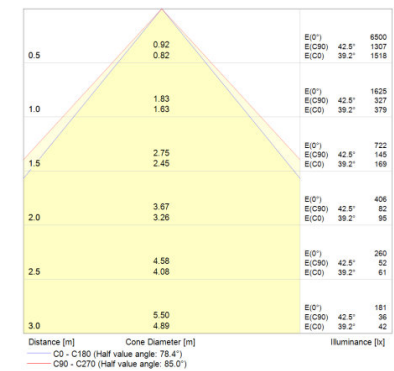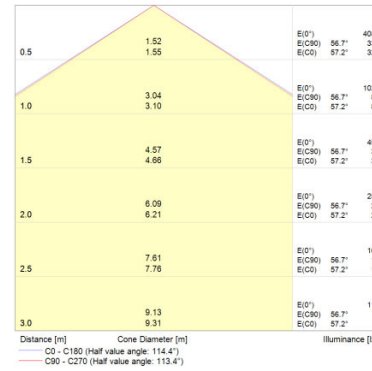
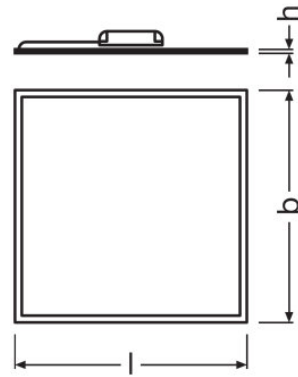
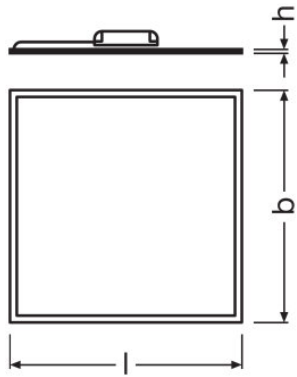


PANEL LED 625 30 W 3000 K, PANEL LED 625 30 W 4000 K, PANEL LED 625 40 W 3000 K, PANEL LED 625 40 W 4000 K

PANEL LED 625 33 W 3000 K UGR < 19, PANEL LED 625 33 W 4000 K UGR < 19

PANEL LED 625 30 W 3000 K

PANEL LED 625 33 W 3000 K UGR < 19

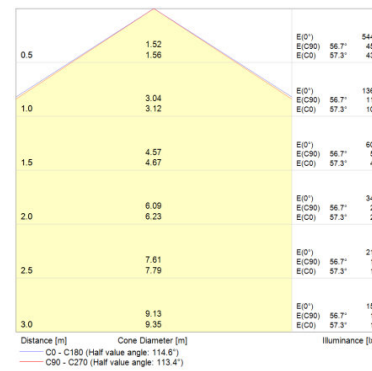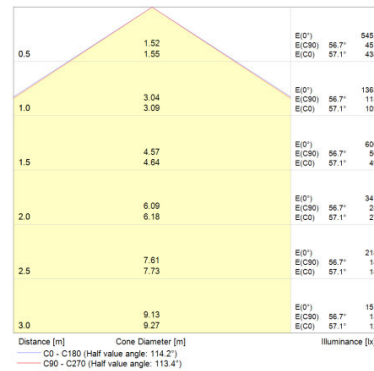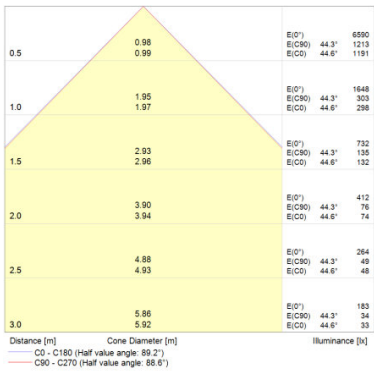

PANEL LED 625 33 W 4000 K UGR < 19

PANEL LED 625 40 W 3000 K

PANEL LED 625 40 W 4000 K

**EQUIPMENT / ACCESSORIES**

– Accessories for several mounting options available

**APPLICATION ADVICE**

For more detailed application information and graphics please see product datasheet.

**LOGISTICAL DATA**

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4058075000643	PANEL LED 625 30 W 3000 K	Shipping carton box 4	720 mm x 170 mm x 670 mm	82.01 dm <sup>3</sup>	17256.00 g
4058075000667	PANEL LED 625 30 W 4000 K	Shipping carton box 4	720 mm x 170 mm x 670 mm	82.01 dm <sup>3</sup>	17256.00 g
4058075811065	PANEL LED 625 33 W 3000 K UGR < 19	Shipping carton box 4	720 mm x 170 mm x 670 mm	82.01 dm <sup>3</sup>	17256.00 g
4058075000728	PANEL LED 625 33 W 4000 K UGR < 19	Shipping carton box 4	720 mm x 170 mm x 670 mm	82.01 dm <sup>3</sup>	16340.00 g
4058075000681	PANEL LED 625 40 W 3000 K	Shipping carton box 4	720 mm x 170 mm x 670 mm	82.01 dm <sup>3</sup>	17256.00 g
4058075000704	PANEL LED 625 40 W 4000 K	Shipping carton box 4	720 mm x 170 mm x 670 mm	82.01 dm <sup>3</sup>	17256.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

**REFERENCES / LINKS**

For Guarantee see

▶ [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

---

**DISCLAIMER**

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.