

Beacon 26W -Trailing Edge Dimming - Flood

4000K Beacon 26W

2052762



Range Features

- High output high efficiency LED spotlight range
- Cutting-edge cooling fin design to maximise thermal management and reduction of LED junction temperature
- IR/UV - free light source without heat radiation
- Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen
- Long Life 50K hours, fit and forget maintenance free lighting solution
- Dimmable versions with on-board dimming, Trailing Edge and Dali as standard from 100-3% output
- Reflector with open front creating a 30° beam angle



PRODUCT OVERVIEW

Beam angle(°)	30° / Flood
Certifications	F-mark
Colour	White
CRI (Ra)	85
EAN code	5025768527625
IP rating	IP20
Lamps	26W LED 4000K
Mount	Single circuit track
Ordering number	2052762
Technology	LED
Voltage (V)	220-240
Included lamp	Integrated LED
Compatible with bulbs of energy class:	A++ A+ A

DATA TABLE

Optical data

Beam angle(°)	30° / Flood
CRI (Ra)	85
Distribution type	Adjustable

General data

Certifications	F-mark
EAN code	5025768527625
Environment	Interior
General application	Museums; Hospitality; Museum
Mount	Single circuit track

Beacon 26W -Trailing Edge Dimming - Flood

4000K Beacon 26W

2052762

National safety marks	ENEC
Ordering number	2052762
Range features	High output high efficiency LED spotlight range Cutting-edge cooling fin design to maximise thermal management and reduction of LED junction temperature IR/UV - free light source without heat radiation Energy efficient light source with far superior luminous flux per watt than existing Low Voltage Halogen Long Life 50K hours, fit and forget maintenance free lighting solution Dimmable versions with on-board dimming, Trailing Edge and Dali as standard from 100-3% output Reflector with open front creating a 30° beam angle
Product name	4000K Beacon 26W
Specific application	Shop window Track lighting
Technology	LED
Sales pack quantity	1
E-number SE	7416889
E-number FI	4274069
Compatible with bulbs of energy class:	A++ A+ A

Physical data

Colour	White
Diameter (mm)	80
Height (mm)	180
Horizontal rotation (°)	360°
IP rating	IP20
Lamp included	Integrated
Reflector finish	Super pure aluminium
Reflector material	Aluminium
Track adaptor type	LS1 adaptor
Vertical tilt (°)	90°
Weight (kg)	1.10
Included lamp	Integrated LED
Outer package dimensions (L x W x H) (cm)	17.50 x 15.00 x 17.50
Single package dimensions (L x W x H) (cm)	17.50 x 15.00 x 17.50







Electrical data

Electrical protection	Class I
Lamps	26W LED 4000K
Leading trailing edge	Yes
Number of heads	1
Total number of lamps	1

Beacon 26W -Trailing Edge Dimming - Flood 4000K Beacon 26W 2052762

Transformer availability	Included
Transformer mounting	Integral
Voltage (V)	220-240

PHOTOMETRY

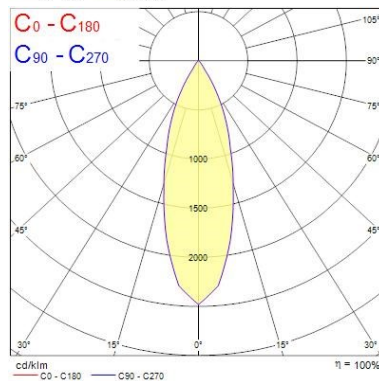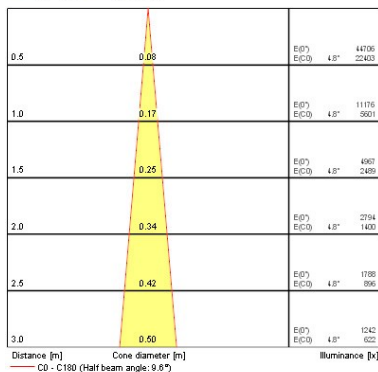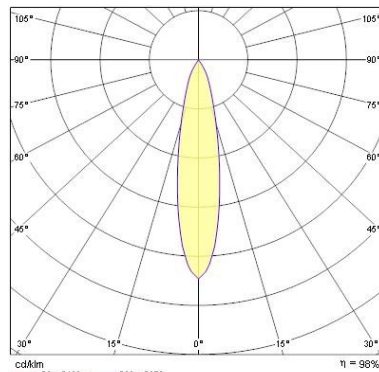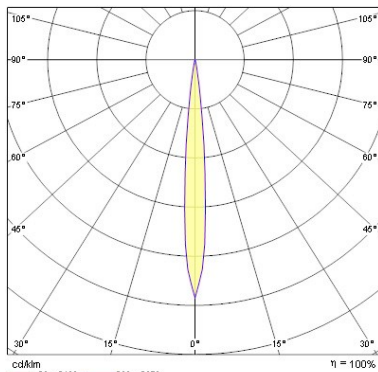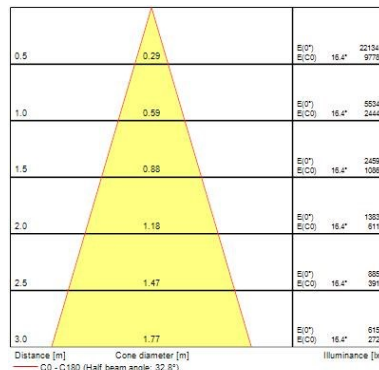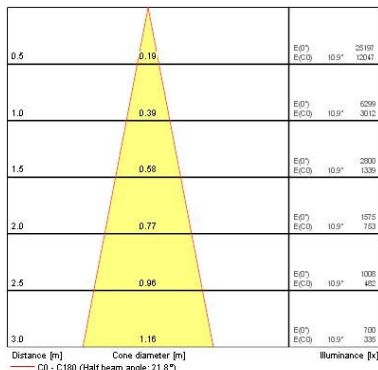


TECHNICAL DRAWINGS


Beacon 26W -Trailing Edge Dimming - Flood

4000K Beacon 26W

2052762




Concord 2052762

 This luminaire contains built in LED lamps.

A++
A+
A
B
C
D
E

} **LED**


The lamps cannot be changed in the luminaire.

874/2012 

Beacon 26W -Trailing Edge Dimming - Flood


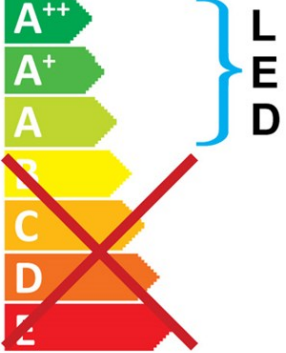
4000K Beacon 26W

2052762



This luminaire contains built in LED lamps.

The lamps cannot be changed in the luminaire.



Concord 2052762 874/2012