

64653 HLX

Halogen lamps with reflector MR16



Product features

- Xenon instead of krypton as the filler gas (XENOPHOT HLX versions)
- Luminous flux up to 10 % higher with same power consumption (XENOPHOT HLX versions)



Technical data

Electrical data


Nominal voltage	24 V
Nominal wattage	250 W

Light technical data

Nominal luminous flux	900 lm
Focal length	35.0 mm

Dimensions & weight

Diameter	51.0 mm
Length	44.5 mm

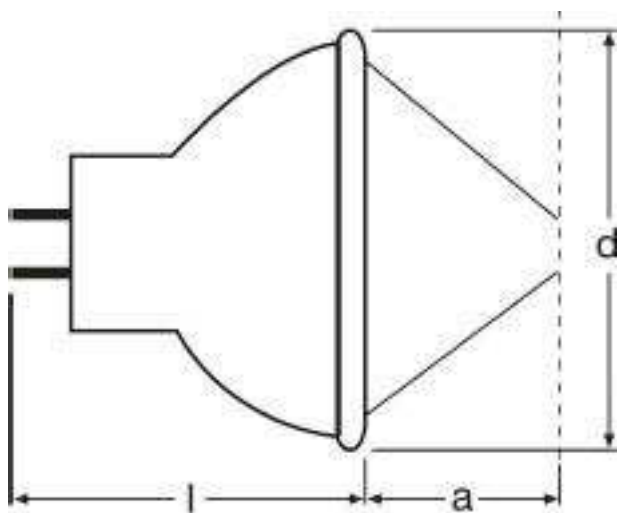

Product line drawing

Lifespan

Lifespan	50 h
----------	------

Additional product data

Base (standard designation)	GX5.3
Coating	Dichroic
Picto Medicine	Yes

Capabilities

Cooling	Forced
Burning position	hs30

Certificates & standards

EEI – Energy Label	B
--------------------	---

Country specific categorizations

ANSI code	ELC
LIF	A1/259
Order reference	64653 HLX



Burning position

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4050300006826	Folding carton box 1	46 mm x 46 mm x 58 mm	36.70 g	0.12 dm ³
4050300946467	Shipping carton box 20	106 mm x 119 mm x 238 mm	810.00 g	3.00 dm ³

References / Links

For further technical information please refer to the following OSRAM brochure:

“Technology and applications, Low-voltage tungsten-halogen lamps”

“Halogen lamps, low and medium voltage for entertainment, technical and medical applications” cross reference list

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.