

Lighting

PHILIPS

MASTER MHN-LA

MASTER MHN-LA 1000W/956 230V XWH

Compact quartz metal halide lamps with double-pinch

Product data

General Information	
Cap-Base	X528 [X528]
Bulb Shape	TD40 [TD 40mm]
Operating Position	P5 [Parallel +/-5D or Horizontal(HOR)]
Life To 5% Failures (Nom)	6000 h
Life To 10% Failures (Nom)	8000 h
Life To 20% Failures (Nom)	10000 h
Life To 50% Failures (Nom)	15000 h
Light Technical	
Color Code	956 [CCT of 5600K]
Luminous Flux (Rated) (Min)	82000 lm
Luminous Flux (Rated) (Nom)	87000 lm
Color Designation	Daylight
Lumen Maintenance 1000 h (Nom)	90 %
Lumen Maintenance 2000 h (Nom)	80 %
Chromaticity Coordinate X (Nom)	337
Chromaticity Coordinate Y (Nom)	331
Correlated Color Temperature (Nom)	5600 K
Luminous Efficacy (rated) (Nom)	86.0 lm/W
Color Rendering Index (Nom)	80
Operating and Electrical	
Lamp supply voltage	230 V [230]
Power (Rated) (Nom)	1040.0 W

Lamp Current Run-Up (Max)	15 A
Lamp Current (EM) (Nom)	9.3 A
Ignition Supply Voltage (Min)	198 V
Voltage (Max)	140 V
Voltage (Min)	110 V
Voltage (Nom)	125 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Cap-Base Information	Cable
Approval and Application	
Energy Efficiency Label (EEL)	A+
Mercury (Hg) Content (Nom)	95 mg
Energy Consumption kWh/1000 h	1144 kWh
UV	
Specific Eff. Radiant Power	270 mW/klm
Luminaire Design Requirements	
Bulb Temperature (Max)	920 °C

MASTER MHN-LA

Pinch Temperature (Max)	350 °C
Product Data	
Full product code	871150020077800
Order product name	MASTER MHN-LA 1000W/956 230V XWH
EAN/UPC - Product	8718291548218
Order code	928072205130

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	1
Material Nr. (12NC)	928072205130
Net Weight (Piece)	132.000 g
ILCOS Code	MN-1000-E-K-/H

0

40.5 mm

х

35 mm


Α

286 mm

Warnings and Safety


- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing

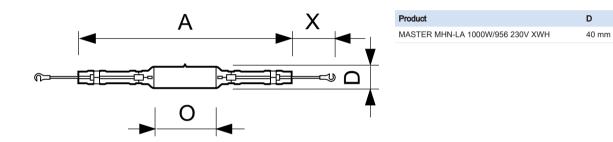

MHN-LA 1000W/956 230V XWH

Photometric data

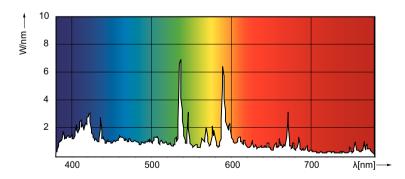

MASTER MHN-LA



© 2017 Philips Lighting Holding B.V. All rights reserved. Philips Lighting reserves the right to make changes in specifications and/or to discontinue any product at any timewithout notice or obligation and will not be liable for any consequences resulting from the use of this publication.

www.lighting.philips.com 2017, January 31 - data subject to change